CHAUVET
Value · Innovation · Performance
Club - DJ - Band - Stage
2009
www.chauvetlighting.com
This is not a toy!
The Castle
Club World Award Winner
The weight-y one!
Big Stuff
It's Green Thinking
This is us...
Aurora

INDEX

16-Pattern Controller p. 75
4Bar™ p. 33 NEW
Arena Hazer™ p. 63
Black Shadow™ p. 57
Blacklight 18” p. 57
Bob™ p. 66
Bubble King™ p. 64
Bubble Machine p. 64
Clamps and Cables p. 69
COLORbank™ LED p. 29
COLORcontroller™ 2.0 p. 28
COLORdash™ Par p. 25 NEW
COLORdash™ Quad p. 23 NEW
COLORdash™Batten p. 24 NEW
COLORpalette™ p. 26
COLORpalette™ II p. 26
COLORstrip™ p. 29
COLORtube™ 2.0 p. 28
Constellation™ p. 19
Cosmos™ 2.1 p. 48
Cyborg™ p. 48
Derby™X p. 42 NEW
D-Fi™ 2.0 p. 72 NEW
Dimmer/Relay Pack p. 74
DJ Bank p. 45 NEW
DMX Mega Strobe™ II p. 58
Double Derby™ p. 47
Double Derby™X p. 42 NEW
Elan™ p. 41
Followspot 400G p. 37
Gel Pack p. 34
GrafXpress p. 51
Handheld Blacklight w/ Flashlight p. 57
Hurricane™ 1100 p. 61 NEW
Hurricane™ 1300 p. 61 NEW
Hurricane™ 1800 Flex p. 60 NEW
Hurricane™ 700 p. 62 NEW
Hurricane™ 900 p. 62 NEW
Insignia™ 2.0 p. 20
Intimidator™ 1.0 p. 21
Intimidator™ 2.0 p. 20
Intimidator™ 2.0 HTI p. 20
Intimidator™ Spot 150 p. 14 NEW
Intimidator™ Spot 250 p. 13 NEW
J-FIVE™ p. 45
Kinta™X p. 43 NEW
LED Mushroom™ p. 43 NEW
LED PAR 38 System p. 33 NEW
LED PAR 56-24 p. 35 NEW
LED PAR 64-36 p. 35 NEW
LED Pinspot p. 67 NEW
LED Shadow™ p. 27, 57
LED Techno Strobe™ p. 27
LED Techno Strobe™ RGB p. 27
LEDrain™ 36 p. 31
LEDrain™ 38 p. 32
LEDrain™ 56 p. 32
LEDrain™ 64 p. 32
LEDsplash™ 152B p. 30 NEW
LEDsplash™ 196 p. 31
LEDsplash™ 2 p. 30
LEDsplash™ 200B p. 30
LEDsplash™ Jr. p. 31
Lil’ Bubbler™ p. 64
Line Dancer™ p. 48
LX10™ p. 46
LX5™ p. 46
LXW™ p. 46 NEW
Mega Strobe™ III p. 58
Mini Line Dancer™ p. 49
Mini Moon™ p. 49
Mini Sphere™ p. 49
Mini Strobe p. 58
MiN™ Spot p. 15
MiN™ Wash p. 15
Mirror Balls & Motor p. 66
Mushroom™ p. 47
Obey™ 10 p. 73 NEW
Obey™ 40 p. 73 NEW
Obey™ 70 p. 73 NEW
PAR 38 p. 34
PAR Can Kit 56 & 64 p. 34
Pinspots p. 67
Power Panel p. 75
Pro-D6 p. 74
Q-Phase™ p. 9 NEW
Q-Roll™ 250 p. 19
Q-Scan™ 250 p. 19
Q-Spot™ 150-LED p. 8 NEW
Q-Spot™ 250-LED p. 7 NEW
Q-Spot™ 152 p. 12
Q-Spot™ 200 p. 12
Q-Spot™ 300 p. 11
Q-Spot™ 575 p. 10
Q-Wash™ 575 p. 16
Q-Wash™ LED p. 17
Q-Wash™ LED-36 p. 17
Relay Pack p. 75
Rock-N’ Lite Pack™ p. 36
Scorpion™ GrafX p. 51
Scorpion™ G p. 56
Scorpion™ LGX p. 55
Scorpion™ RG p. 54
Scorpion™ Scan p. 54
Scorpion™ Sky p. 55
Scorpion™ Storm p. 52 NEW
Scorpion™ Storm RG p. 53 NEW
ShowXpress™ p. 71
Stage Designer™ 50 p. 72 NEW
Stage™ 4 p. 75
Strobe Controller p. 58
SX™ Abyss p. 47
Techno Strobe™ 2000S p. 58
Timer System™ Package p. 74
Trusses & Stands p. 68
Ultimate HZ™ p. 63
Vue™ 1.1 p. 39 NEW
Vue™ 2.1 p. 39 NEW
Vue™ 3.1 p. 40 NEW
Vue™ 4.1 p. 40 NEW
Vue™ 6.1 p. 41 NEW

THE INDUSTRY’S BEST WARRANTY

CHAUVET® provides a 24-month limited warranty* on DMX-controllable fixtures and controllers, a 12-month limited warranty* on effect fixtures and non-programmable controllers, and a 90- day warranty* on laser diodes. Please consult your warranty* card for further details or visit www.chauvetlighting.com
*Warranty valid only within the United States.

CONTENTS

Accessories	66-69
Atmospheric Effects	60-64
Blacklights	57
Controllers	71-75
DMX Effect Lighting	39-43
Effect lighting (Non DMX)	45-49
Followspot	37
Lasers	51-56
Moving Yokes	7-17
Moving Yokes Spot	7-15
Moving Yokes Wash	15-17
Scanners	19-21
Strobes	58
Wash Lights (Static)	23-37
Bank	36
LED	23-33,35
PAR	34

BY SERIES

COLORdash™	23-25
Hurricane™	60-62
Intimidator™	13, 14, 20, 21
LEDsplash™	30-31
LEDrain™	31-32
MiN™	15
Obey™	73
Q-Series™	7-12, 16-17, 19
Scorpion™	51-56
Vue™	39-41
X-Series™	42-43

What's Hot...

COLORdash™ Series

Three exciting new high-power, LED-fitted washes to suit a variety of needs, priced right. Pages 23-25

INTIMIDATOR™ SERIES

Adding to the immensely popular Intimidator™ Series of intelligent lights, the Intimidator™ Spot 250 & 150 are two new fixtures packed with features that are certain to "turn heads"! Pages 13-14

Q-SERIES™

The company that brought you the first LED-fitted moving yoke spot changes the game again! The Q-Spot™ 250 & 150 LED are high powered moving yoke spots that compete with their discharge counterparts in output, without the heat and short lived lamps. Pages 7-8

X SERIES

A new lightweight line of DMX controllable effect fixtures powered by LEDs. All X Series™ fixtures can be stacked into arrays using the X-Bracket to create an impressive display to fill any room. Pages 42-43

Feature Packed, Great Value

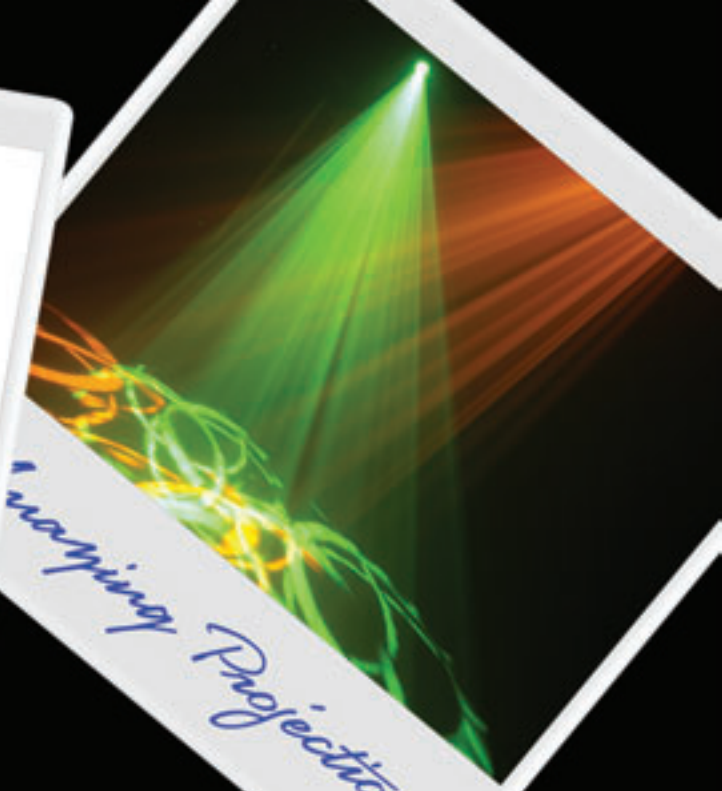

Amazing Projection

Moving Yoker

Game Changer

Tried, True & Tes

Q-SPOT 250-LED

New

CONTROL FEATURES
- 12 or 15-channel DMX-512 LED moving yoke
- Pan: 540º / Tilt: 270º
- Color wheel
  - 7 colors + white
  - Rainbow color spin at variable speeds
- Static gobo wheel with gobo shake
  - 7 interchangeable, slot-n-lock gobos + open
  - Gobo wheel spin at variable speeds
- Rotating gobo wheel with gobo shake
  - 7 interchangeable, gobos + open
  - Gobo wheel spin at variable speeds
- 3-facet, high speed rotating prism at variable speeds
- Variable electronic strobe
- Variable electronic dimmer (0 – 100%)
- Remote fixture reset and vector speed channel
- Built-in effect macros via DMX (gobo, gobo rotation, color, strobe, prism)
- 255 user-programmable steps without DMX controller
- Move-in-black for pan/tilt
- Built-in automated programs via master/slave or DMX
- Built-in sound activated programs via master/slave or DMX

ADDITIONAL FEATURES
- High-powered, 5W (1500mA) LEDs
- 3-pin and 5-pin DMX connections
- User-selectable pan/tilt ranges
- Automatic pan/tilt correction
- Reset to factory settings option
- User-selectable basic or advanced operating modes

SPECIFICATIONS
- Beam angle: 15°
- Lux: 6,660 @ 1m
- Light source: 27 (white) LEDs 50,000hrs
- Power and current: 120V 60Hz: 65.4W, 0.5A operating, 0.4A inrush
- AC power: Autoswitching 100V – 240V 50/60Hz
- Weight: 48 lbs. (21.7kg)
- Size: 15.2in x 12.6in x 24.5in
  385m. x 320mm. x 623mm

Gobos

Colors

Q-SPOT 150-LED

New

CONTROL FEATURES
- 9 or 11-channel DMX-512 LED moving yoke
- Pan: 530° / Tilt: 270°
- Color wheel
  - 8 colors + white
  - Rainbow color spin at variable speeds
- Rotating gobo wheel with gobo shake
  - 7 interchangeable, slot-n-lock gobos + open
  - Gobo wheel spin at variable speeds
- 3-facet prism
- Variable electronic strobe
- Variable electronic dimmer (0 – 100%)
- Remote fixture reset
- 255 user-programmable steps without DMX controller
- Move-in-black for pan/tilt
- Built-in automated programs
- Built-in sound activated programs

ADDITIONAL FEATURES
- High-powered, 20W (1000mA) LED
- User-selectable pan/tilt ranges
- Automatic pan/tilt correction
- Reset to factory settings option
- User-selectable basic or advanced operating modes

SPECIFICATIONS
- Beam angle: 16°
- Lux: 4,180 @ 1m
- Light source: 1 (white) LED 50,000hrs
- Power and current: 120V, 60Hz: 50W, 0.4A operating, 0.1A inrush
- AC power: Autoswitching 100V – 240V 50/60Hz
- Weight: 13.5lbs (6.1kg)
- Size: 9.5in x 9.47in x 14.3in
  242mm x 240mm x 364mm

Gobos

Colors

Q-PHASE™

New

CONTROL FEATURES
- 10, 19, or 28-channel DMX-512 LED moving yoke beam light
- Pan: 540º / Tilt: 250º
- Variable electronic strobe for each LED
- Variable electronic dimmer (0 – 100%) for each LED
- Remote fixture reset and vector speed channel
- Move-in-black for pan/tilt
- Built-in automated programs via DMX
- Built-in sound activated programs via DMX

ADDITIONAL FEATURES
- High-powered, 6W (1,400mA) LEDs
- 3-pin and 5-pin DMX connections
- User-selectable pan/tilt ranges
- Automatic pan/tilt correction
- Reset to factory settings option

SPECIFICATIONS
- Beam angle: 5°
- Lux: 18,200 @ 1m (per LED)
- Light source: 9 (white) LEDs 50,000hrs
- Power and current: 120V, 60Hz: 95W, 0.8A operating, 1A inrush, PF 1.00
- AC power: Autoswitching 100V – 240V 50/60Hz
- Weight: 42lbs (19kg)
- Size: 15.3in x 12.6in x 17.7in
  390mm x 320mm x 450mm

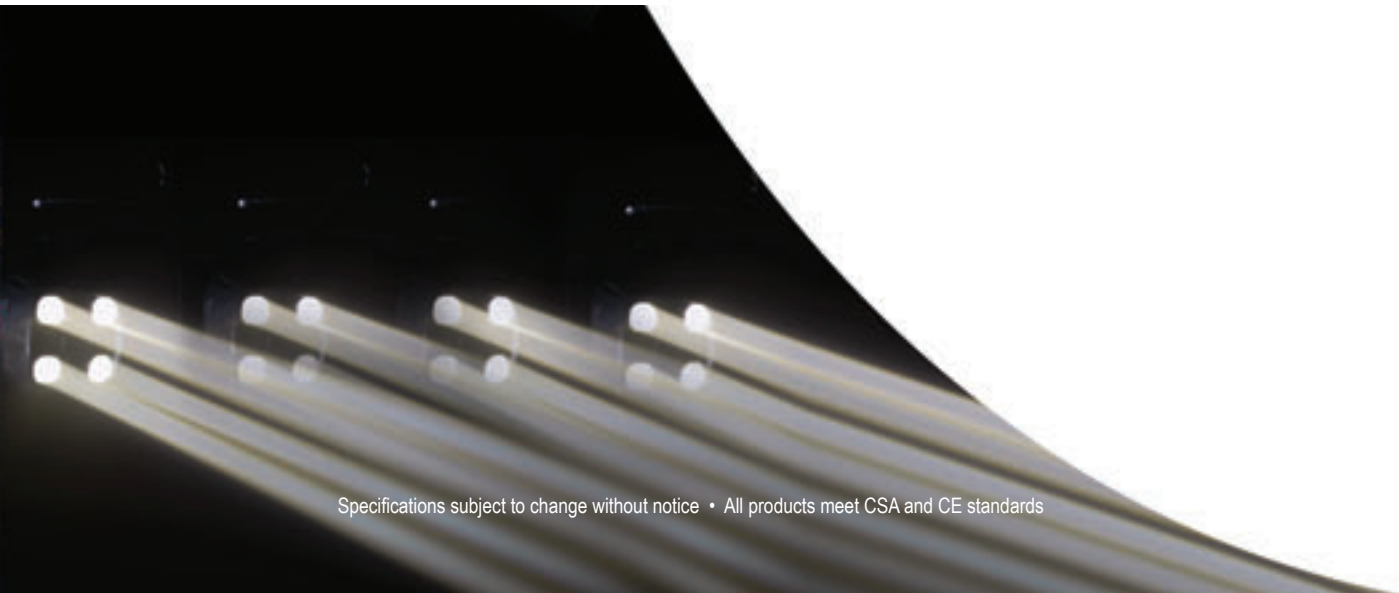

Q-SPOT 575

CONTROL FEATURES
- 16-channel DMX-512 moving yoke
- Pan: 540° / Tilt: 270°
- Color wheel
  - 10 colors + white
  - 8 solid colors, 1 split color, 1 quad color
  - Rainbow color spin at variable speeds
- Static gobo wheel with gobo shake
  - 9 interchangeable gobos + open
  - Gobo wheel spin at variable speeds
- Indexed, rotating gobo wheel with gobo shake
  - 6 interchangeable, indexing, rotating + open
  - 3 metal, 3 glass installed
  - Rotating gobo wheel spin at variable speeds
- 3-facet, high-speed prism rotating bi-directionally at variable speeds
- Variable motorized shutter (for strobing)
- Variable motorized focus
- Variable motorized dimmer (0 – 100%)
- Remote fixture reset, lamp on/off & vector speed channel

ADDITIONAL FEATURES
- Additional free gobos: 1 glass & 4 metal
- Automatic pan & tilt correction
- Built-in automated programs via master/slave
- Built-in sound-active programs via master/slave
- 16bit pan/tilt resolution

SPECIFICATIONS
- Beam angle: 17°
- Lux: 55,468 @ 1m
- Light source: HMI575/GS 575W 6,000°K 1,000hrs
- Power and current: 120V, 60Hz: 625W, 5.7A operating, 11A inrush, PF 0.95
- AC power: Switchable (internal) 100V, 115V, 200V, 230V – 50/60Hz
- Weight: 74lbs (33.6kg)
- Size: 15.9in x 13.7in x 25.4in
  404mm x 348mm x 529mm

Gobos

Extra Gobos

Colors

Q-SPOT™ 300

CONTROL FEATURES
- 12, 13 or 15-channel DMX-512 moving yoke
- Pan: 530° / Tilt: 280°
- Color wheel
  - 7 colors + white
  - Split colors
  - Rainbow color spin at variable speeds
- Static gobo wheel with gobo shake
  - 4 interchangeable, slot-n-lock gobos + open
  - 2 metal, 2 glass installed
  - 2 CT filters (3,200ºK & 5,000ºK)
  - Gobo wheel spin at variable speeds
- Indexed rotating gobo wheel with gobo shake
  - 5 interchangeable, indexing rotating + open
  - 3 metal, 2 glass installed
  - Rotating gobo wheel spin at variable speeds
- ***Frost filter for color washing***
- 3-facet, high-speed prism rotating bi-directionally at variable speeds
- Variable motorized shutter (for strobing)
- Variable motorized focus
- Variable motorized dimmer (0 – 100%)
- Remote fixture reset, lamp on/off & vector speed channel
- Built-in effect macros via DMX (gobo, gobo rotation, color, strobe, prism)

ADDITIONAL FEATURES
- Additional free gobos: 5 metal
- User-selectable pan/tilt ranges
- Automatic pan & tilt correction
- Built-in automated programs via master/slave
- Built-in sound-active programs via master/slave
- User-selectable basic or advanced operating modes
- Q-Spot™ 250 compatibility mode
- LCD display with password protection

SPECIFICATIONS
- Beam angle: 20°
- Lux: 43,148 @ 1m
- Light source: MSD250 250W 8,000°K 2,000hrs
- Power and current: 120V, 60Hz: 370W, 3A operating, 2.1A inrush, PF 0.97
- AC power: Switchable (internal) 100V,115V, 200V, 230V – 50 or 60Hz
- Weight: 62lbs (28kg)
- Size: 15.3in x 17.8in x 20.5in
  389mm x 452mm x 521mm

Gobos

Extra Gobos

Colors

Specifications subject to change without notice • All products meet CSA and CE standards

Q-SPOT™ 200

Linkable with Q-Spot™ 152

CONTROL FEATURES
- 10 or 14-channel DMX-512 moving yoke
- Pan: 540° / Tilt: 270°
- Color wheel: 9 colors + white, split colors , rainbow color spin at variable speeds
- Rotating gobo wheel with gobo shake, 7 interchangeable, rotating + open (4 metal, 3 glass installed), Rotating gobo wheel spin at variable speeds
- 3-facet prism
- Variable motorized shutter (for strobing)
- Variable motorized focus
- Variable motorized dimmer (0 – 100%)
- Remote fixture reset & vector speed channel
- Built-in effect macros via DMX (gobo, gobo rotation, color, strobe, prism)
- Built-in automated programs via master/slave or DMX
- Built-in sound-active programs via master/slave or DMX

ADDITIONAL FEATURES
- Additional free gobos: 5 metal
- Automatic pan & tilt correction
- User-selectable basic or advanced operating modes

SPECIFICATIONS
- Beam angle: 14°
- Lux: 72,307 @ 1m
- Light source: MSD250 250W 8,000°K 2,000hrs
- Power and current: 120V, 60Hz: 334W, 2.8A operating, 2.4A inrush, PF 0.94
- AC power: Switchable 115V/230V 50/60Hz
- Weight: 40lbs (18.2kg)
- Size: 11.4in x 15in x 18.9in
  290mm x 380mm x 480mm

Colors

Gobos

Extra Gobos

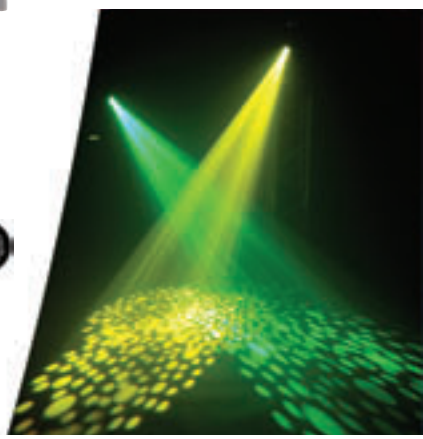

Q-SPOT™ 152

Linkable with Q-Spot™

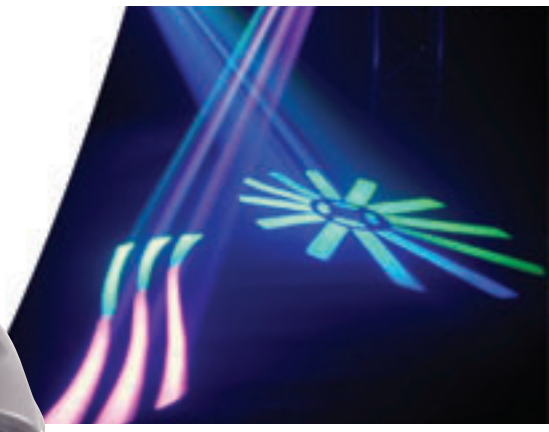

CONTROL FEATURES
- 8 or 12-channel DMX-512 moving yoke
- Pan: 540° / Tilt: 270°
- Color wheel: 9 colors + white, Split colors, Rainbow color spin at variable speeds
- Rotating gobo wheel with gobo shake, 7 interchangeable, rotating + open (4 metal, 3 glass installed), Rotating gobo wheel spin at variable speeds
- Variable motorized shutter (for strobing)
- Variable motorized dimmer (0 – 100%)
- Remote fixture reset & vector speed channel
- Built-in effect macros via DMX (gobo, gobo rotation, color, strobe)
- Built-in automated programs via master/slave or DMX
- Built-in sound-active programs via master/slave or DMX

ADDITIONAL FEATURES
- Additional free gobos: 5 metal
- User-selectable basic or advanced operating modes
- Beam angle: 15°
- Lux: 14,450 @ 1m
- Light source: HTI150 150W 6,500°K 750hrs
- Power and current: 120V, 60Hz: 195W, 1.6A operating, 1.2A inrush, PF 0.90
- AC power: Switchable 115/230V 50/60Hz
- Weight: 27.2lbs (12.3kg)
- Size: 13.8in x 11.3in x 18.5in
  350mm x 287mm x 470mm

INTIMIDATOR™ SPOT 250

New

CONTROL FEATURES
- 10 or 14-channel DMX-512 moving yoke
- Pan: 540° / Tilt: 270°
- Color wheel
  - 7 interchangeable, slot-n-lock colors + white
  - Split colors
  - Rainbow color spin at variable speeds
- Indexed rotating gobo wheel with gobo shake
  - 7 interchangeable, slot-n-lock gobos + open
  - 5 metal, 2 glass installed
  - Rotating gobo wheel spin at variable speeds
- 3-facet, high-speed prism rotating at variable speeds
- Variable motorized shutter (for strobing)
- Variable motorized focus
- Variable motorized dimmer (0 – 100%)
- Remote fixture reset, lamp on/off & vector speed channel
- Individual reset of pan/tilt, color, gobo, shutter, prism, focus
- Move-in-black for pan/tilt, color, gobo
- Built-in effect macros via DMX (gobo, gobo rotation, color, strobe, prism)
- Built-in automated programs via master/slave or DMX
- Built-in sound-active programs via master/slave or DMX

ADDITIONAL FEATURES
- Pan/tilt lock during transportation
- 3-pin and 5-pin DMX connections
- User-selectable pan/tilt ranges
  - Pan: 540°, 360°, 180°
  - Tilt: 270°, 180°, 90°
- Automatic pan & tilt correction
- User-selectable basic or advanced operating modes

SPECIFICATIONS
- Beam angle: 22°
- Lux: 18,000 @ 1m
- Light source: MSD250 250W 8,000°K 2,000hrs
- Power and current: 120V, 60Hz: 403W, 3.6A operating, 5.8A inrush, PF 0.90
- AC power: Switchable 115V/230V 50/60Hz
- Weight: 58.6lbs (26.6kg)
- Size: 16.3in x 13.3in x 20.4in
  414mm x 337mm x 517mm

Gobos

Colors

INTIMIDATOR™ SPOT 150 *New*

CONTROL FEATURES
- 8 or 12-channel DMX-512 moving yoke
- Pan: 540° / Tilt: 270°
- Color wheel
  - 7 colors + white
  - Split colors
  - Rainbow color spin at variable speeds
- Indexed rotating gobo wheel with gobo shake
  - 7 interchangeable gobos + open
  - 5 metal, 2 glass installed
  - Rotating gobo wheel spin at variable speeds
- Variable motorized shutter (for strobing)
- Variable motorized dimmer (0 – 100%)
- Remote fixture reset, lamp on/off & vector speed channel
- Individual reset of pan/tilt, color, gobo, shutter
- Move-in-black for pan/tilt, color, gobo
- Built-in effect macros via DMX (gobo, gobo rotation, color, strobe)
- Built-in automated programs via master/slave or DMX
- Built-in sound-active programs via master/slave or DMX

ADDITIONAL FEATURES
- 3-pin and 5-pin DMX connections
- User-selectable pan/tilt ranges
  - Pan: 540°, 360°, 180°
  - Tilt: 270°, 180°, 90°
- Automatic pan & tilt correction
- User-selectable basic or advanced operating modes

SPECIFICATIONS
- Beam angle: 14°
- Lux: 10,800 @ 1m
- Light source: HTI150 150W 6500°K 750hrs
- Power and current: 120V, 60Hz: 221W, 1.5A operating, 3A inrush, PF 0.92
- AC power: Switchable 115V/230V 50/60Hz
- Weight: 40lbs (18.1kg)
- Size: 13.4in x 13.1in x 17.6in
  340mm x 333mm x 446mm

Gobos



Colors

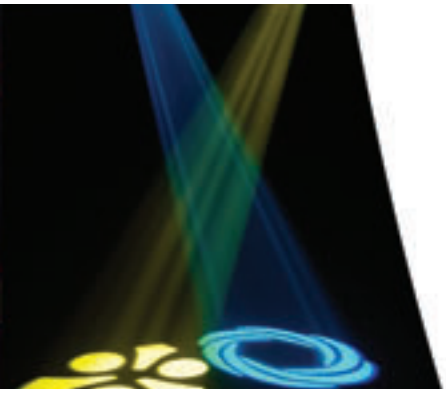

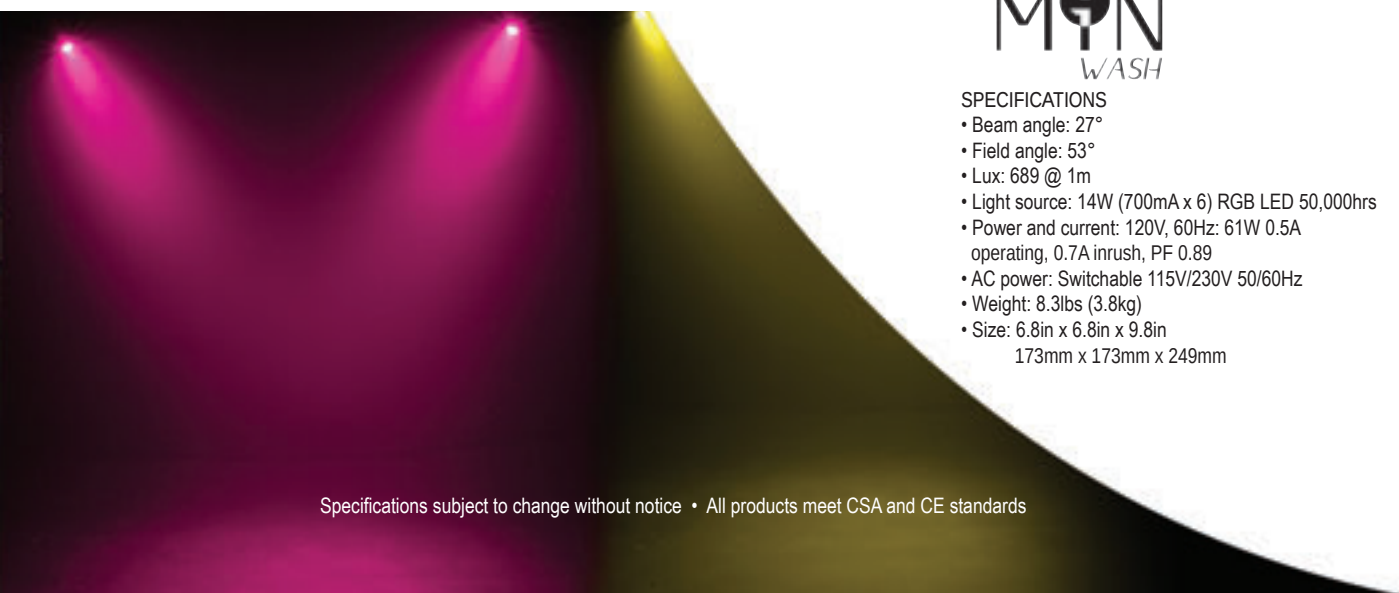



• Gobo wheel 9 gobos + open
Gobo wheel spin effect

MTN SPOT

MTN WASH

CONTROL FEATURES
- 5 or 13-channel DMX-512 LED moving yoke
- Pan: 540º / Tilt: 270º
- RGB color mixing
- Variable electronic strobe
- Variable electronic dimmer (0 – 100%)
- Vector speed channel for pan/tilt, RGB color mixing and color macros
- Built-in movement macros via DMX

ADDITIONAL FEATURES
- Built-in automated programs via master/slave (fast and slow)
- Built-in sound activated programs via master/slave
- User-selectable basic or advanced operating modes
- User-selectable pan/tilt ranges
  Pan: 540°, 360°, 180°
  Tilt: 270°, 180°, 90°
- Reset to factory settings option
- Pan/tilt invert option

OPTIONS
- Easy Controller (CA-9), page 20

MTN SPOT

SPECIFICATIONS
- Beam angle: 13°
- Lux: 1,076 @ 1m
- Light source: 14W (700mA x 6) RGB LED 50,000hrs
- Power and current: 120V, 60Hz: 68W, 0.6A operating, 0.7A inrush, PF 0.91
- AC power: Switchable 115V/230V 50/60Hz
- Weight: 8.3lbs (3.8kg)
- Size: 6.8in x 6.8in x 9.8in
  173mm x 173mm x 249mm

MTN WASH

SPECIFICATIONS
- Beam angle: 27°
- Field angle: 53°
- Lux: 689 @ 1m
- Light source: 14W (700mA x 6) RGB LED 50,000hrs
- Power and current: 120V, 60Hz: 61W 0.5A operating, 0.7A inrush, PF 0.89
- AC power: Switchable 115V/230V 50/60Hz
- Weight: 8.3lbs (3.8kg)
- Size: 6.8in x 6.8in x 9.8in
  173mm x 173mm x 249mm

Q-WASH™ 575

CONTROL FEATURES
- 16-channel DMX-512 moving yoke color wash
- Pan: 530º / Tilt: 280º
- CMY color mixing system with vector speed
- 31 color macros
- Color wheel: 6 colors + white
  Red, blue, green, purple, 3,200º & 5,000ºK correction filters
  Bi-directional rainbow color spin at variable speeds
- Beam shaper & frost filter effects
- Variable motorized shutter (for strobing)
- Variable motorized zoom (13º - 15º)
- Variable motorized dimmer (0 – 100%)
- Remote fixture reset, lamp on/off and vector speed channel

ADDITIONAL FEATURES
- Automatic pan & tilt correction
- Built-in automated programs via master/slave
- Built-in sound actived programs via master/slave
- 16bit pan/tilt resolution

SPECIFICATIONS
- Beam angle: 13º - 15º
- Field angle: 26º - 34º
- Lux: 58,104 @ 1m
- Light source: HMI575/GS 575W 6,000ºK lamp 1,000hrs
- Power and current: 120V, 60Hz: 680W, 6A operating, 9.5A inrush, PF 0.97
- AC power: Switchable (internal) 100V, 115V, 200V, 230V – 50/60Hz
- Weight: 75.8lbs (34kg)
- Size: 16in x 16in x 23in
  406mm x 406mm x 584mm

Colors

CMY Color Mixing

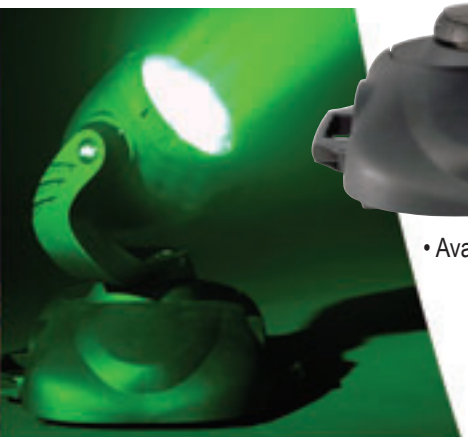

• Available in white or black

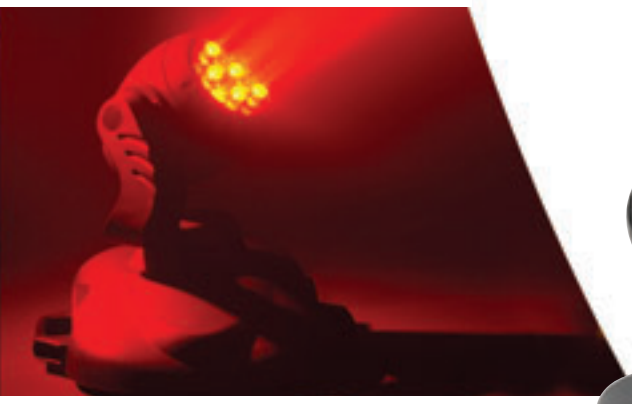

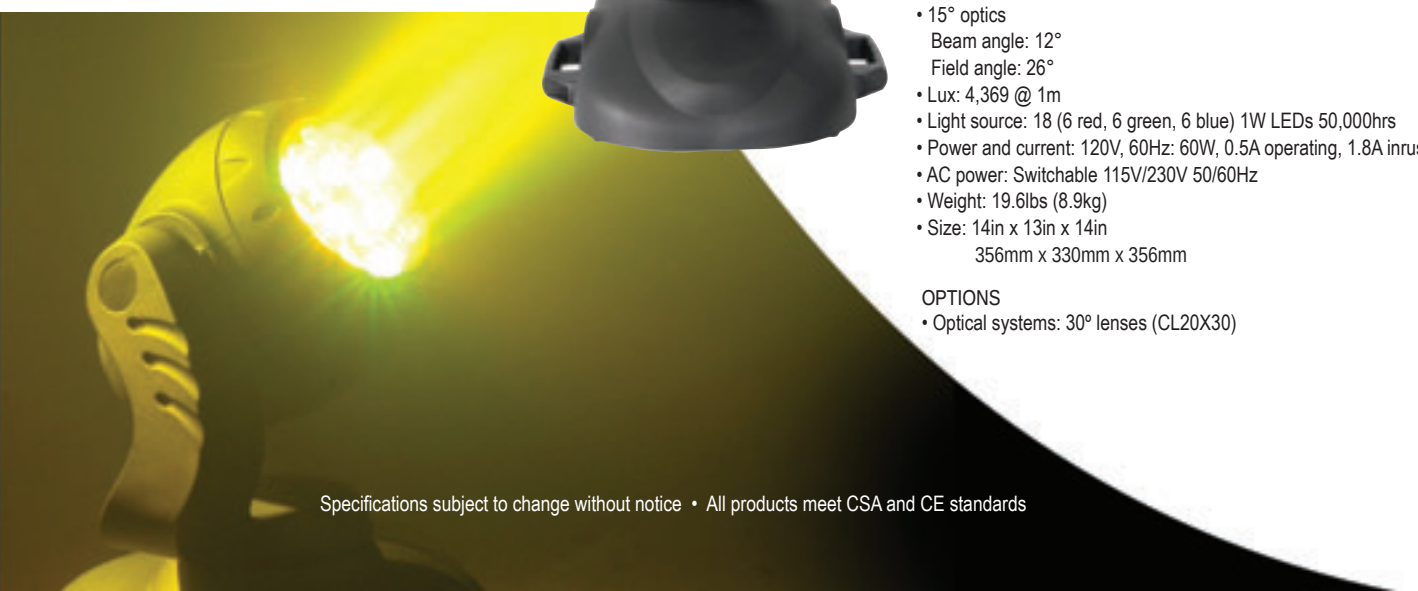

Q-WASH™ LED-36

CONTROL FEATURES
- 10-channel DMX-512 LED moving yoke color wash
- Pan: 540° / Tilt: 270°
- RGB color mixing with or without DMX controller
- Variable electronic strobe
- Variable electronic dimmer (0 - 100%)
- Remote fixture reset and vector speed channel
- 100 user-programmable steps without DMX controller
- Built-in automated programs via master/slave or DMX
- Built-in sound activated programs via master/slave or DMX

ADDITIONAL FEATURES
- High-power, 1W (350mA) LEDs
- Automatic pan & tilt correction
- Reset to factory settings option
- Adjustable fan speed
- 15º lenses installed

Q-WASH™ LED-36

SPECIFICATIONS
- 15° optics
  Beam angle: 13°
  Field angle: 26°
- Lux: 13,784 @ 1m
- Light source: 36 (12 red, 12 green, 12 blue) 1W LEDs 50,000hrs
- Power and current: 120V, 60Hz: 84W, 0.7A operating, 3.7A inrush, PF 0.92
- AC power: Switchable 115V/230V 50/60Hz
- Weight: 20.5lbs (9.3kg)
- Size:14in x 13.5in x 14.3in
  356mm x 343mm x 363mm

Q-WASH™ LED

SPECIFICATIONS
- 15° optics
  Beam angle: 12°
  Field angle: 26°
- Lux: 4,369 @ 1m
- Light source: 18 (6 red, 6 green, 6 blue) 1W LEDs 50,000hrs
- Power and current: 120V, 60Hz: 60W, 0.5A operating, 1.8A inrush, PF 0.82
- AC power: Switchable 115V/230V 50/60Hz
- Weight: 19.6lbs (8.9kg)
- Size: 14in x 13in x 14in
  356mm x 330mm x 356mm

OPTIONS
- Optical systems: 30º lenses (CL20X30)

. . Powerful...

Scan Artist

Scanners

Roll with it

Unbeatable Value

CONSTELLATION™

DMX-800

CONTROL FEATURES
- 13 or 19-channel DMX-512 centerpiece
- Operating modes
  - 13-channel: control pan and tilt in pairs
  - 19-channel: control pan and tilt separately for each head
- Pan: 180° / Tilt: 90° (each mirror)
- Individual pan/tilt control of each mirror
- Variable strobe/shutter/dimmer
- 6 rotating gobo wheels: 7 glass, rotating gobos + open on each
- Rotating gobo wheel spin effect for each wheel
- Remote fixture reset, lamp on/off and vector speed channel
- Built-in automated programs via master/slave or DMX
- Built-in sound activated programs via master/slave or DMX

ADDITIONAL FEATURES
- Flight case included
- Centrally located lamp holder for easy lamp changes

SPECIFICATIONS
- Beam angle: 12º (each head); 73º (entire unit)
- Lux: 105,276 @ 1m
- Light source: HMI575/GS 575W 6,000°K lamp 1,000hrs
- Power and current: 120V, 60Hz: 637W, 6.4A operating, 10.2A inrush, PF 0.85
- AC power: Switchable 115V/230V 50/60Hz
- Weight: 99.2lbs (45kg)
- Size: 33.5in x 31.5in x 11.8in
  850mm x 800mm x 300mm

Gobos

Q-SCAN™ 250

Q-ROLL™ 250

CONTROL FEATURES
- 6 or 7-channel DMX-512 scanner
- Q-Scan™ 250: Pan/ Tilt: 180° / 70°
- Q-Roll™ 250: Pan: 180° / Barrel rotation: 360° continuous
- Color wheel: 11 colors (incl. 1 quad and 1 tri-color) + white
  Rainbow color spin at variable speeds
- Indexed, rotating gobo wheel with gobo shake
  8 interchangeable, rotating + open
  6 metal, 2 glass installed
  Rotating gobo wheel spin at variable speeds
- Variable motorized shutter (for strobing)
- Variable motorized dimmer (0 – 100%)
- Remote fixture reset & vector speed channel

ADDITIONAL FEATURES
- Additional free gobos: 2 metal
- Removable stands
- Built-in automated programs via master/slave
- Built-in sound-active programs via master/slave

SPECIFICATIONS
- Beam angle: 16° • Lux: 20,928 @ 1m
- Light source: MSD250 250W 8,000°K lamp 3,000hrs
- Power and current: 120V, 60Hz: 316W, 2.8A operating, 7.2A inrush, PF 0.97
- AC power: Switchable 115V/230V 50/60Hz
- Weight: 32lbs (14.5kg)
- Size: 11.5in x 12in x 29in
  292mm x 305mm x 737mm

Gobos

Extra Gobos

Colors

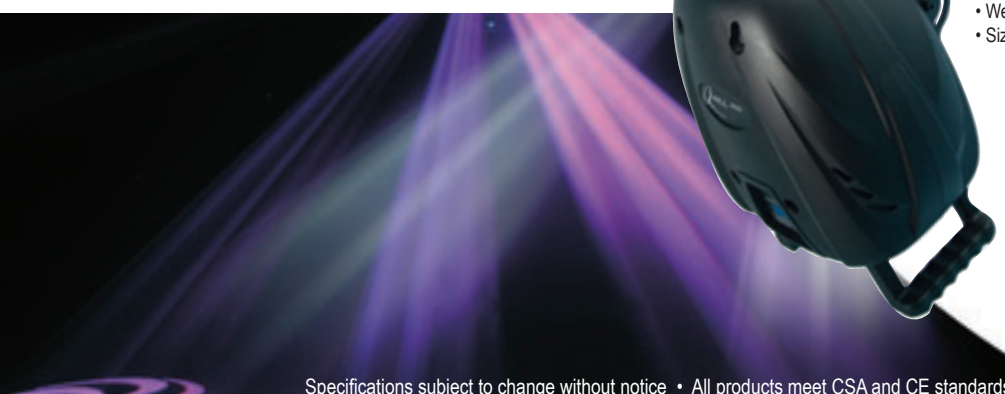



Specifications subject to change without notice • All products meet CSA and CE standards

INTIMIDATOR™ 2.0 HTI

INTIMIDATOR™ 2.0

INSIGNIA™ 2.0

CONTROL FEATURES
- 5-channel DMX-512 scanner
- INTIMIDATOR™ 2.0 HTI , INTIMIDATOR™ 2.0: Pan: 180º / Tilt: 90°
- INSIGNA™ 2.0: Pan: 180º / Barrel rotation: 360° continuous
- Color wheel
  - 11 colors + white
  - 1 quad color, 1 tri color
  - Rainbow color spin effect
- Gobo wheel with gobo shake
  - 14 gobos + open
  - 12 metal, 2 glass installed
  - Gobo wheel spin effect
- Variable motorized shutter (for strobing)

ADDITIONAL FEATURES
- Built-in automated programs via master/slave
- Built-in sound-active programs via master/slave
- Double bracket yoke doubles as floor stand
- Automatically enters stand alone when no DMX signal is present
- Insignia™, Insignia™2.0, Intimidator™, Intimidator™ 2.0 HTI, Intimidator™ 2.0 are linkable

SPECIFICATIONS
- Beam angle: 12º
- INSIGNIA™ 2.0 , INTIMIDATOR™ 2.0: Lux: 13,000 @ 1m
- INTIMIDATOR™ 2.0 HTI: Lux: 19,368 @1m
- INTIMIDATOR™ 2.0 HTI Light source: HTI150 150W 6,500°K 750hrs
- INTIMIDATOR™ 2.0 Light source: ELC3 24V 250W 3,400°K 300hrs
- INSIGNIA™ 2.0: Light source: ELC3 24V 250W 3,400°K 300hrs
- INSIGNIA™ 2.0 , INTIMIDATOR™ 2.0: Power and current: 120V, 60Hz: 288W, 2.4A operating, 2A inrush, PF 0.96
- INTIMIDATOR™ 2.0 HTI: Power and current: 120V, 60Hz: 360W, 3A operating, 1.4A inrush, PF 0.98
- AC power: Switchable 115V/230V 50/60Hz
- Weight: 19.5lbs (8.9kg)
- Size: 23in x 10.5in x 6.8in
  584mm x 267mm x 171mm

OPTIONS
- Easy Controller (CA-9)

- Easy Controller (CA-9)

Colors

Gobos

INTIMIDATOR™ 1.0

CONTROL FEATURES
- 4-channel DMX-512 scanner
- Pan: 180° / Tilt: 90°
- Variable strobe
- Combined color/gobo wheel:
  18 colors and 14 gobos + white
  Rainbow color spin effect

ADDITIONAL FEATURES
- Built-in automated programs via master/slave
- Built-in sound-active programs via master/slave
- Double-bracket yoke doubles as floor stand
- Automatically enters stand alone when no DMX signal is present
- Bulb-saver cuts off after 10 seconds

SPECIFICATIONS
- Beam angle: 12.5°
- Lux: 8,920 @ 1m
- Light source: ELC3 24V 250W 3,400°K 300hrs
- Power and current: 120V, 60Hz: 264W, 2.2A operating, 3.3A inrush
- AC power: 115V/60Hz or 230V/50Hz
- Weight: 9.4lbs (4.3kg)
- Size: 13in x 6.3in x 5.3in
  330mm x 160mm x 135mm

OPTIONS
- Easy Controller (CH-X)

Gobos

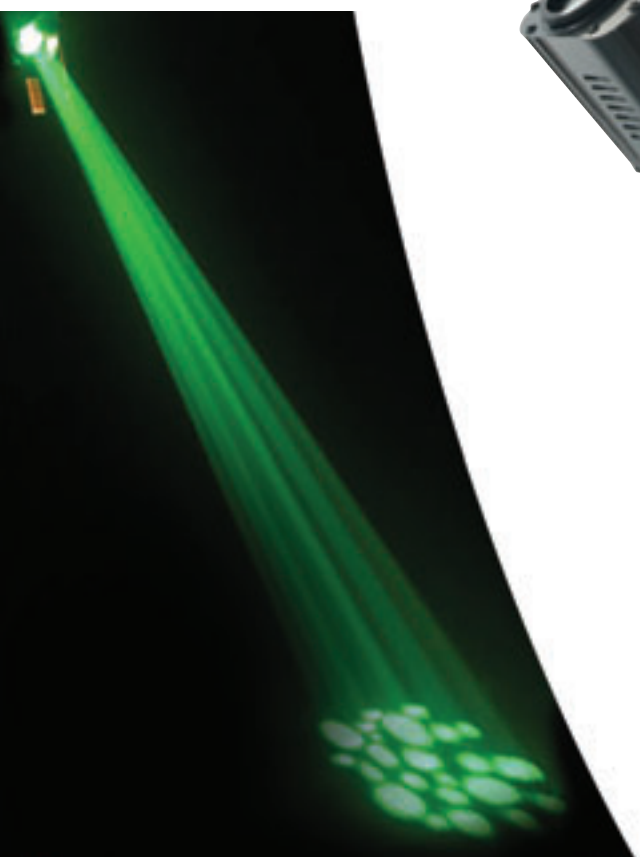

INTIMIDATOR™ SERIES

16 million colors..and change
Washes
Don't sweat

New COLORdash™ Quad

CONTROL FEATURES
- 3, 4, 10 or 12-channel DMX 512 wash light (with ID addressing)
- Operating modes
  - 3-channel: RGB
  - 4-channel: RGB, Dimmer
  - 10-channel: RGB, ID, Dimmer, Macro, Strobe, Automatic, Custom, Module Select
  - 12-channel: RGB control of each block
- RGB color mixing with or without DMX controller
- Built-in automated programs via master/slave or DMX
- Program and recall custom programs via master/slave or DMX

ADDITIONAL FEATURES
- High-power, 1W (350mA) LEDs
- 25° x 6° lenses installed
- Adjustable fan speed
- Additional (IEC) power output: max 10 units @ 120V
- Includes 6.6ft. (2m) power extension cable
- LCD display with password protection
- Transfer custom programs between fixtures
- Double-bracket yoke doubles as floor stand
- 3-pin and 5-pin DMX connections
- Multiple mounting options (linear or array) with included brackets

SPECIFICATIONS
- Beam angle: 25° x 10°
- Field angle: 46° x 21°
- Lux: 4,800 @ 1m
- Light source: 36 (12 red, 12 green, 12 blue) LEDs 50,000hrs
- Power and Current 120V, 60Hz; 59W, 0.5A operating, 0.2A inrush
- AC power: Autoswitching 100V – 240V 50/60Hz
- Weight: 9.9lbs (4.9kg)
- Size: 18.5in x 7.1in x 5in
  470mm x180mm x126mm

OPTIONS
- COLORado Controller (COLOR-CON), page 25
- Optical systems 15°(CL20X15), 30° (CLENS3009)
- 33ft (10m) power extension cable (EXT-2)

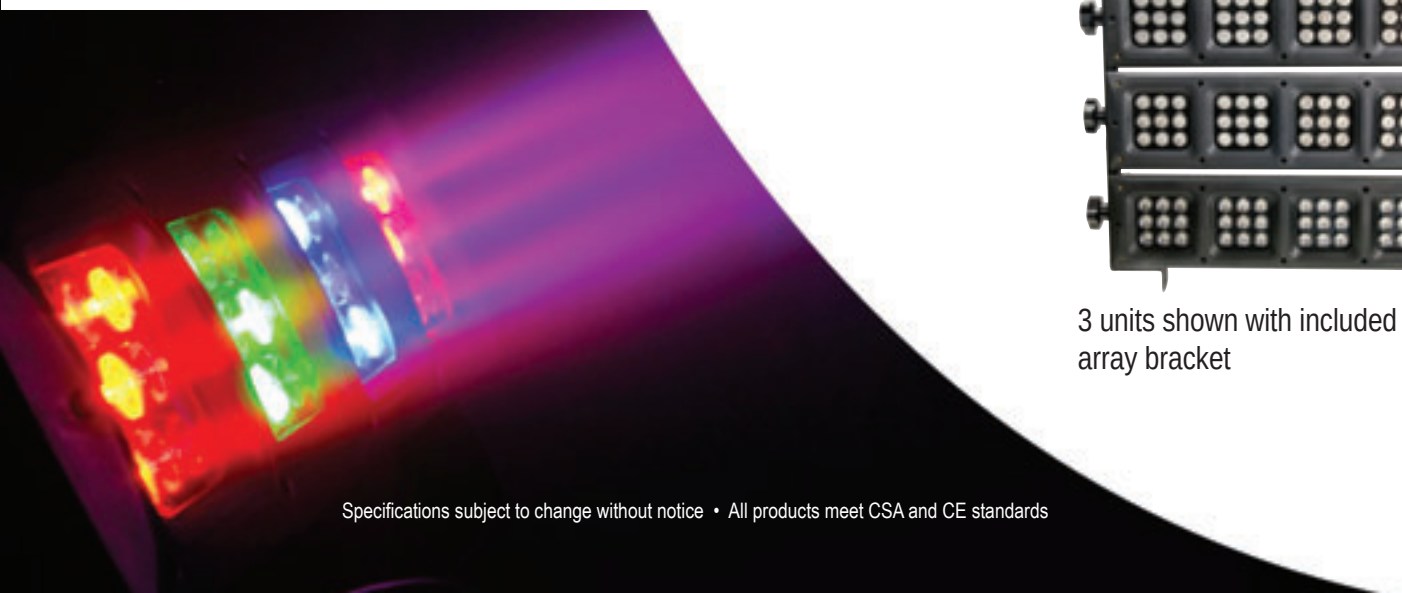

3 units shown with included array bracket

COLORdash™ Batten New

CONTROL FEATURES
- 3, 4, 10, or 12-channel DMX-512 LED bank system (with ID addressing)
- Operating modes
  3-channel: RGB control
  4-channel: RGB, dimmer
  10-channel: RGB, ID, dim, macro, strobe, automatic, custom, module select
  12-channel: RGB of 4 separate sections
- RGB color mixing with or without DMX controller
- Color temperature presets (3,200ºK - 8,500ºK)
- Built-in automated programs via master/slave or DMX
- Program and recall custom programs via master/slave or DMX
- Adjustable fan speeds

ADDITIONAL FEATURES
- High-power, 1W (350mA) LEDs
- 30° lenses installed
- Additional threaded hole on rear for mounting (size M10)
- Additional (IEC) power output: max 13 units @ 120V
- Attach multiple units together with the included bracket
- Includes 6.6ft (2m) power extension cable
- LCD display with password protection
- Transfer custom programs between fixtures

SPECIFICATIONS
- Beam angle: 35°x 30°
- Field angle: 62°x 60°
- Lux: 1,750 @ 1m
- Light source: 24 (8 red, 8 green, 8 blue) LEDs 50,000hrs
- Power and current: 120V, 60Hz: 58W, 0.8A operating, 1.6A inrush
- AC power: Autoswitching 100V – 240V 50/60Hz
- Weight: 7.9lbs (3.6kg)
- Size: 18.5in x 3.3in x 7.5in
  470mm x 84mm x 191mm

OPTIONS
- COLORado™ Controller (COLOR-CON) (page 25)
- Optical systems: 15° (CL20X15)
- 33ft (10m) power extension cable (EXT-2)



3 units shown with included array bracket

2 units shown with included array bracket

New COLORdash™ Par

CONTROL FEATURES
- 3, 4 or 9-channel DMX-512 LED wash light (with ID addressing)
- RGB color mixing with or without DMX control
- Built-in automated programs via master/slave, DMX or COLOR-CON
- Program and recall custom programs via master/slave or DMX

ADDITIONAL FEATURES
- High-power, 1W (350mA) LEDs
- Additional threaded hole on rear for mounting (size M10)
- 15° lenses installed
- Additional (IEC) power output: max 25 units @ 120V
- Includes 6.6ft (2m) power extension cable
- LCD display with password protection
- Adjustable barn doors to direct output (includes gel frame)

SPECIFICATIONS
- Beam angle: 12°
- Field angle: 24°
- Lux: 7,400 @ 1m
- Light source: 18 (6 red, 6 green, 6 blue) 1W LEDs 50,000hrs
- Power and current: 120V, 60Hz: 30W, 0.4A operating, 0.8A inrush
- AC power: Autoswitching 100V – 240V 50/60Hz
- Weight: 5.8lbs (2.6kg)
- Size: 14in x 8.5in x 6in
  356mm x 216mm x 152mm

OPTIONS
- COLORado™ Controller (COLOR-CON)
- Optical systems: 30° lenses (CL20X30)

COLORado™ CONTROLLER

COLOR-CON

- 4-channel DMX-512 controller works with COLORdash™ PAR, Batten (page 24) ,Quad (page 23)
- 16 editable programs
  8 color wash
  8 effect
- Controls up to 66 units (using ID addressing)
- 8 user-programmable shows with 100 steps each
- Full RGB color mixing
- Playback schedules via internal clock
- LCD display with password protection
- Power: DC 12V 500mA 115V/60Hz or 230V/50Hz
- Weight: 1lb (0.5kg)
- Size: 7in x 5in x 2in
  178mm x 127mm x 51mm

COLORpalette™

LED-PALETTE

CONTROL FEATURES
- 6, 9, 15 or 27-channel DMX-512 LED panel
- Operating modes
  6-channel: RGB control
  9-channel: 2 sections of RGB control
  15-channel: 4 sections of RGB control
  27-channel: 8 sections of RGB control
- Built-in automated programs via master/slave or DMX
- Built-in sound activated programs via master/slave or DMX

ADDITIONAL FEATURES
- Includes brackets for wall or truss mounting

SPECIFICATIONS
- Beam angle: 31° x 29°
- Field angle: 56° x 54°
- Lux: 1,334 @ 1m
- Light source: 288 (96 red, 96 green, 96 blue) long life LEDs
- Power and current: 120V, 60Hz: 12W, 0.1A operating, 0.2A inrush
- AC power: Autoswitching 100V - 240V 50/60Hz
- Weight: 6.2lbs (2.8kg)
- Size: 16.8in x 9.8in x 7in
  425mm x 248mm x 178mm

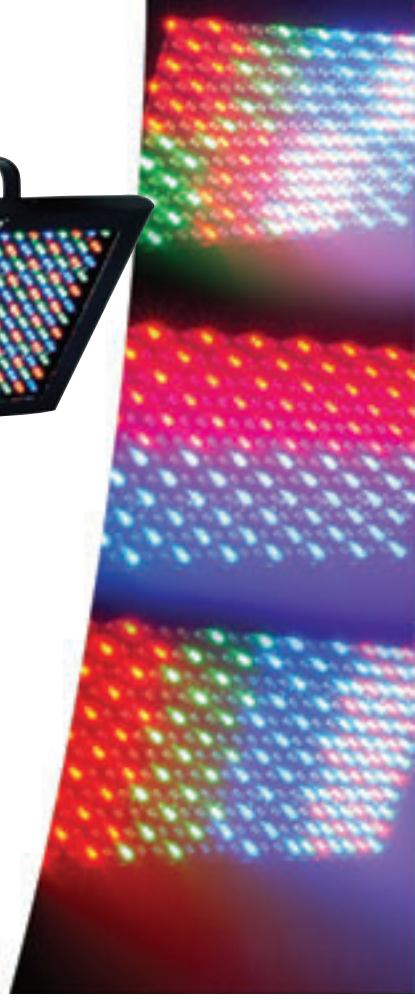

COLORpalette™II

CONTROL FEATURES
- 6, 9, 15 or 27-channel DMX-512 LED panel
- Operating modes
  6-channel: RGB control
  9-channel: 2 sections of RGB control
  15-channel: 4 sections of RGB control
  27-channel: 8 sections of RGB control
- Built-in automated programs via master/slave or DMX
- Built-in sound activated programs via master/slave or DMX

ADDITIONAL FEATURES
- Additional power output: max. 8 units @ 120V
- Includes brackets for wall or truss mounting

SPECIFICATIONS
- Beam angle: 21° x 18°
- Field angle: 45° x 44°
- Lux: 4,121 @ 1m
- Light source: 48 (16 red, 16 green, 16 blue) high power 1W (350mA) LEDs, 50,000hrs
- Power and current: 120V, 60Hz: 58W, 0.6A operating, 2A inrush, PF 0.75
- AC power: Autoswitching 100V - 240V 50/60Hz
- Weight: 11.7lbs (5.3kg)
- Size: 18.5in x 10.5in x 3.5in
  470mm x 267mm x 89mm

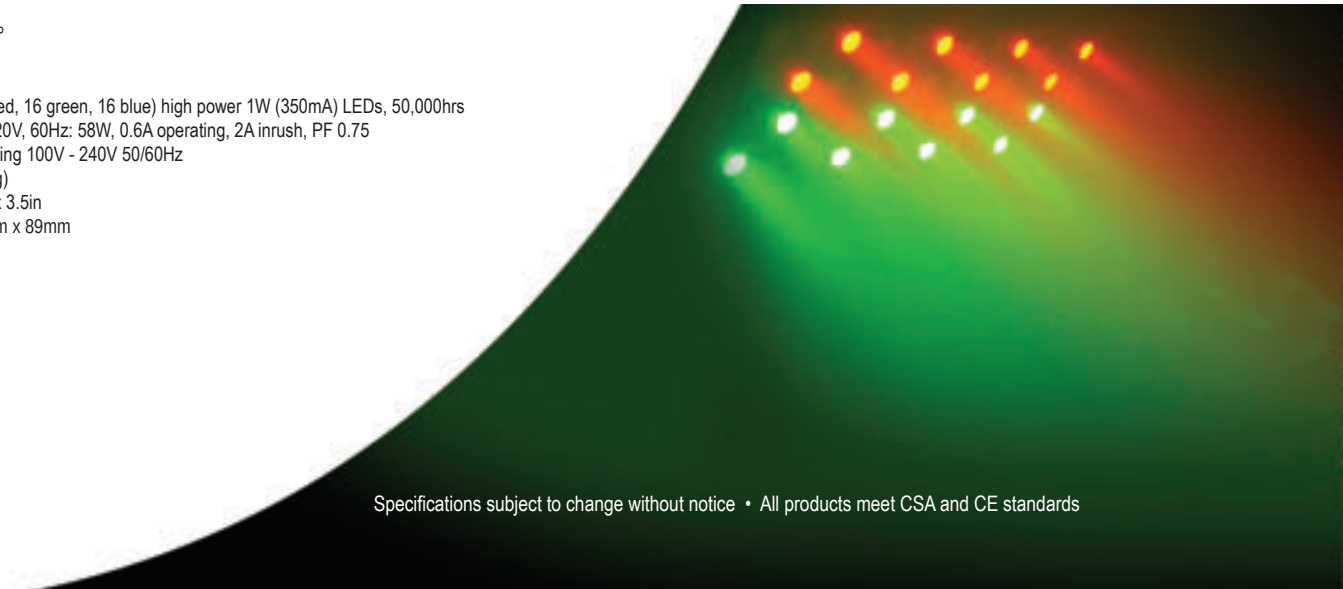

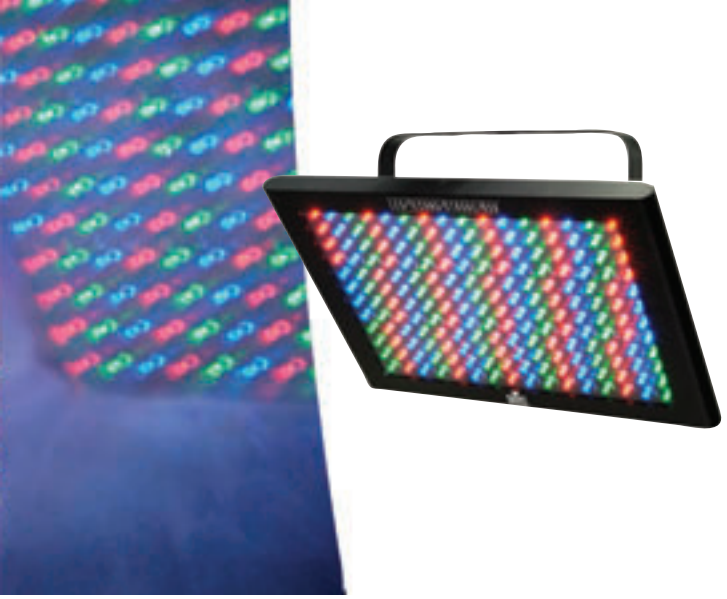

LED TECHNO STROBE™ RGB

ST-4000RGB

CONTROL FEATURES
- 6-channel DMX-512 LED strobe system
- Blackout/static/dimmer/strobe
- Static colors and RGB color mixing with or without DMX controller
- Adjustable flash rate, dimmer and static in stand-alone via dipswitches
- Built-in automated programs via master/slave or DMX
- Built-in sound activated programs via master/slave or DMX

ADDITIONAL FEATURES
- Linkable with LED Shadow™, LED Techno Strobe™ (page 27), LEDsplash™ 200B, LEDsplash™ 152B & LEDsplash™ 2 (page 30) in stand alone
- Additional power output: max 50 units @ 120V
- Includes brackets for wall or truss mounting

SPECIFICATIONS
- Beam angle: 34°
- Field angle: 54°
- Lux: 560 @ 1m
- Light source: 192 (64 red, 64 green, 64 blue) LEDs
- Power and current: 120V, 60Hz: 12W, 0.1A operating, 0.2A inrush
- AC power: Autoswitching 100V - 240V 50/60Hz
- Weight: 4.9lbs (2.2kg)
- Size: 14in x 9.75in x 6.5in
  356mm x 248mm x 165mm

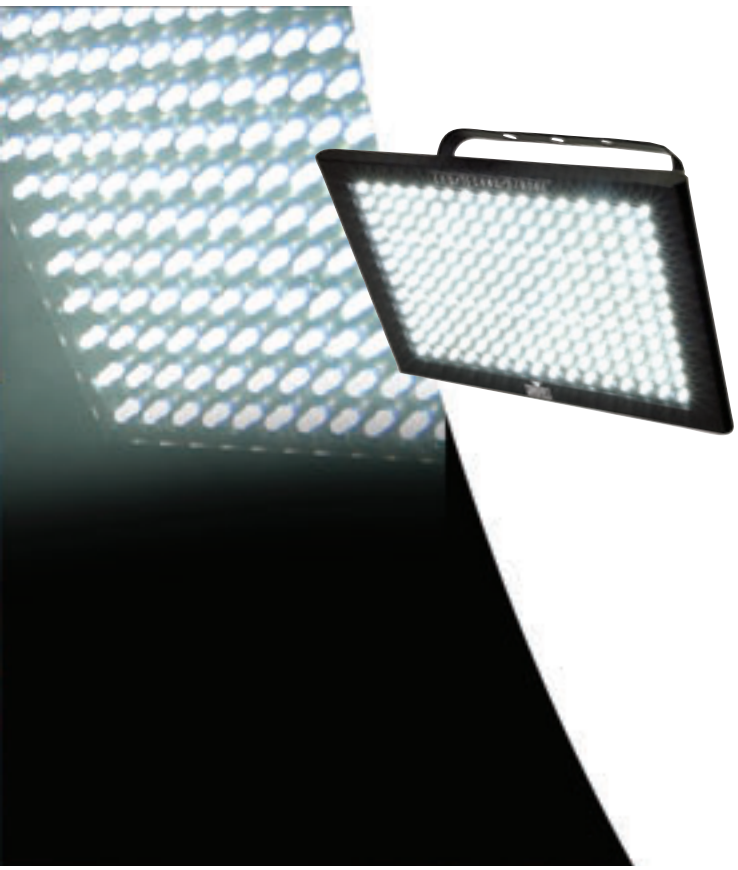

LED TECHNO STROBE™

ST-3000LED

CONTROL FEATURES
- 3-channel DMX-512 LED white strobe light
- Blackout/static/dimmer/strobe
- Adjustable flash rate, dimmer and static in stand-alone via dipswitches
- Built-in automated programs via master/slave or DMX
- Built-in sound activated programs via master/slave or DMX

ADDITIONAL FEATURES
- Linkable with LED Shadow™, LED Techno Strobe™ RGB, (page 27) LEDsplash™ 200B, LEDsplash™ 152B & LEDsplash™ 2 (page 30) in stand alone
- Additional power output: max 50 units @ 120V
- Includes brackets for wall and truss mounting

SPECIFICATIONS
- Beam angle: 21° x 24°
- Field angle: 40° x 43°
- Lux: 1,321 @ 1m
- Light source: 192 (white) LEDs
- Color temperature: 6,500° - 8,000°K
- Power and current: 120V, 60Hz: 0.1A operating, 0.2A inrush
- AC power: Autoswitching 100V - 240V 50/60Hz
- Weight: 4.9lbs (2.2kg)
- Size: 14in x 9.75in x 6.5in
  356mm x 248mm x 165mm

LED Shadow™

TFX-UVLED

CONTROL FEATURES
- 3-channel DMX-512 LED UV blacklight
- Blackout/static/dimmer/strobe
- Adjustable flash rate, dimmer and static in stand-alone via dipswitches
- Built-in automated programs via master/slave or DMX
- Built-in sound activated programs via master/slave or DMX

FOR COMPLETE SPECIFICATIONS
SEE PAGE 57

COLORtube™ 2.0

LED-T40A

- 22 built-in stand alone programs via external controller
- Colors: red, green, yellow, blue, purple, cyan, white
- Static colors and color mixing with or without optional controller
- Built-in color change programs
- Ingress Protection: IP44
- Tube composition: milky white UV-coated optically diffused polycarbonate
- Aluminum base housing
- Includes bracket for wall mounting
- Light source: 144 (48 red, 48 green, 48 blue) LEDs
- Power and current: 120V, 60Hz: 20W, 0.2A operating, 0A inrush
- AC power: Autoswitching 100V – 240V 50/60Hz
- Weight: 3lbs (1.4kg)
- Size: 40in x 2.3in x 3in
  1,016mm x 57mm x 76mm

• COLORtube™2.0 photos shown are for representational purposes only; units cannot achieve different patterns at the same time with the same controller

OPTIONS
- COLORcontroller™ 2.0 (LED-CHVA)
- 5ft (1.5m) signal extension cable (LED-SIG5A)
- 15ft (4.6m) signal extension cable (LED-SIG15A)
- 5ft (1.5m) power extension cable (LED-EXTP5A)
- 15ft (4.6m) power extension cable (LED-EXTP15A)
- 5ft (1.5m) power cable (LED-PC5A)
- Signal booster 2.0 (LED-BOOSTA)

COLORcontroller™ 2.0

LED-CHVA

- 4-channel DMX-512 COLORtube™ 2.0 controller
- 7 independently selectable preset colors
- 13 programmed chases
- Speed and flash rate control channel
- Selection of preset color combinations
- Can control up to 1,000 tubes using signal boosters
- 30 varied patterns (with color changes)
- Built-in automated programs
- Built-in sound activated programs
- Power: DC 12V 500mA 115V/60Hz or 230V/50Hz
- Weight: 1.5lbs (0.7kg)
- Size: 8in x 4in x 1.2in
  206mm x 102mm x 30mm

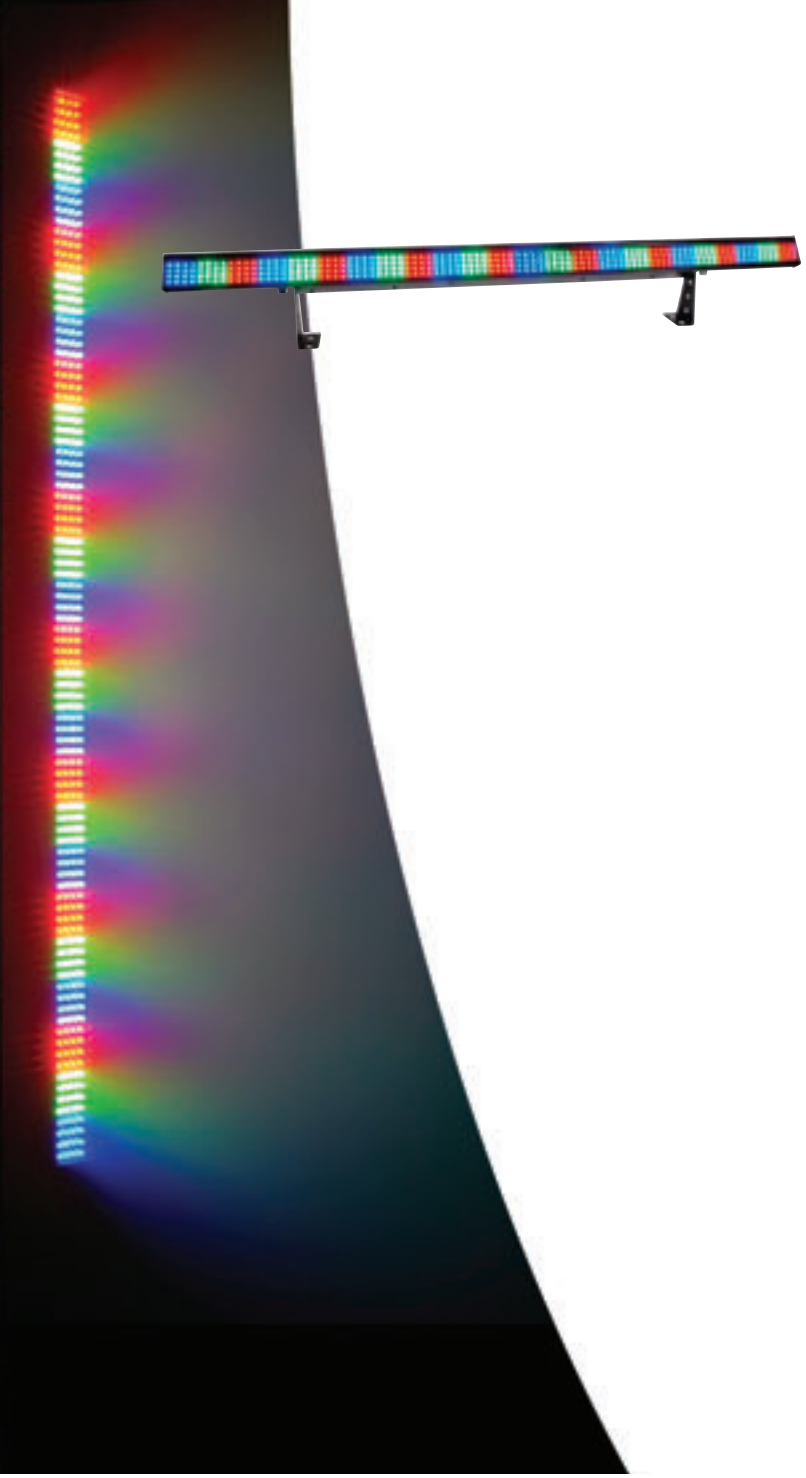

COLORstrip™

CONTROL FEATURES
- 4-channel DMX-512 LED linear wash light
- Blackout/static/dimmer/strobe
- Static colors and RGB color mixing with or without DMX control
- Built-in automated programs via master/slave or DMX
- Built-in sound-actived programs via master/slave or DMX

ADDITIONAL FEATURES
- Linkable with COLORbank™ LED
- Additional power output: max. 32 units @ 120V
- Additional slave output allows for color-changing runway effect with up to 31 units

SPECIFICATIONS
- Beam angle: 63° x 29°
- Field angle: 82° x 52°
- Lux: 1,127 @ 1m
- Light source: 384 (128 red, 128 green, 128 blue) long life LEDs
- Power and current: 120V, 60Hz: 33W, 0.3A operating, 0.2A inrush
- AC power: Autoswitching 100V - 240V 50/60Hz
- Weight: 4.5lbs (2kg)
- Size: 38in x 2.5in x 6in
  965mm x 64mm x 152mm

OPTIONS
- COLORstrip™ Foot Controller (LED-FS1)

COLORbank™ LED

CONTROL FEATURES
- 4-channel DMX-512 LED bank system
- Blackout/static/dimmer/strobe
- Static colors and RGB color mixing with or without DMX control
- Built-in automated programs via master/slave or DMX
- Built-in sound activated programs via master/slave or DMX

ADDITIONAL FEATURES
- Linkable with COLORstrip™
- Additional power output: max. 32 units @ 120V
- Additional slave output allows for color-changing runway effect (up to 31 units)

SPECIFICATIONS
- Beam angle: 38° x 30° • Field angle: 63° x 53° • Lux: 599 @ 1m
- Light source: 304 (160 red, 72 green, 72 blue) LEDs (76 per bank) long life LEDs
- Power and current: 120V, 60Hz: 24W, 0.2A operating, 0.3A inrush
- AC power: Autoswitching 100V - 240V 50/60Hz
- Weight: 6.5lbs (3kg)
- Size: 22.5in x 5.8in x 3.8in
  572mm x 146mm x 97mm

Attached fixtures

LEDsplash™ 2

CONTROL FEATURES
- 6-channel DMX-512 LED wash light
- Blackout/static/dimmer/strobe
- Static colors and RGB color mixing with or without DMX control
- Built-in automated programs via master/slave or DMX
- Built-in sound activated programs via master/slave or DMX

ADDITIONAL FEATURES
- Additional power output: max 8 units @ 120V
- Linkable with LED Shadow™, LED Techno Strobe™, LED Techno Strobe™ RGB (page 27), LEDsplash™ 200B & LEDsplash™152B (page 30) in stand-alone

SPECIFICATIONS
- Beam angle: 20°
- Field angle: 40º
- Lux: 950 @ 1m
- Light source: 24 (8 red, 8 green, 8 blue) high power 1W (350mA) LEDs 50,000hrs
- Power and current: 120V, 60Hz: 19W, 0.3A operating, 1.4A inrush
- AC power: Autoswitching 100V – 240V 50/60Hz
- Weight: 4.7lbs (2.1kg)
- Size: 9.5in x 9in x 6.8inv
  241mm x 229mm x 171mm

LEDsplash™ 200B

CONTROL FEATURES
- 6-channel DMX-512 LED wash light
- Blackout/static/dimmer/strobe
- Selector switch for sound actived or automated programs
- Static colors and RGB color mixing with or without DMX control
- Built-in automated programs via master/slave or DMX
- Built-in sound activated programs via master/slave or DMX

ADDITIONAL FEATURES
- Linkable with LED Shadow™, LED Techno Strobe™, LED Techno Strobe™ RGB (page 27), LEDsplash™ 2 & LEDsplash™ 152B (page 30) in stand-alone

SPECIFICATIONS
- Beam angle: 28°
- Field angle: 49º
- Lux: 930 @ 1m
- Light source: 199 (67 red, 66 green, 66 blue) LEDs
- Power and current: 120V, 60Hz: 19W, 0.2A operating, 0.2A inrush
- AC power: Switchable 115V/230V 50/60Hz
- Weight: 4.7lbs (2.1kg)
- Size: 9.5in x 9in x 6.8in
  241mm x 229mm x 171mm

LEDsplash™ 152B

New

CONTROL FEATURES
- 6-channel DMX-512 LED wash light
- Blackout/static/dimmer/strobe
- Selector switch for sound active or automatic programs
- Static colors and RGB color mixing with or without DMX controller
- Built-in automated programs via master/slave or DMX
- Built-in sound activated programs via master/slave or DMX

ADDITIONAL FEATURES
- Linkable with LED Shadow™, LED Techno Strobe™, LED Techno Strobe™ RGB (page 27), LEDsplash™ 200B & LEDsplash™ 2 (page 30) in stand alone

SPECIFICATIONS
- Beam angle: 37º
- Field angle: 60º
- Lux: 740 @ 1m
- Light source: 151 (51 red, 50 green, 50 blue) LEDs
- Power and current: 120V, 60Hz: 20W, 0.1A operating, 0.8A inrush
- AC power: Switchable 115V/230V 50/60Hz
- Weight: 3.1lbs (1.4kg)
- Size: 5.5in x 7.5in x 8.2in
  140mm x 191mm x 209mm

Specifications subject to change without notice • All products meet CSA and CE standards

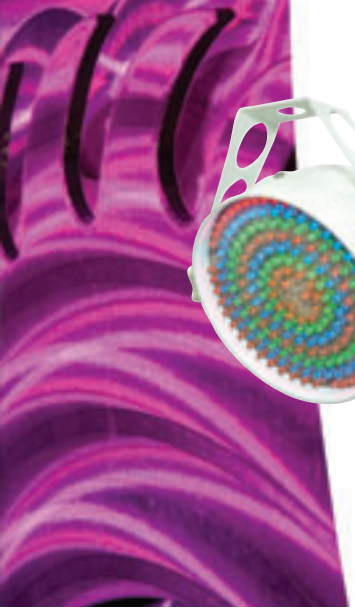

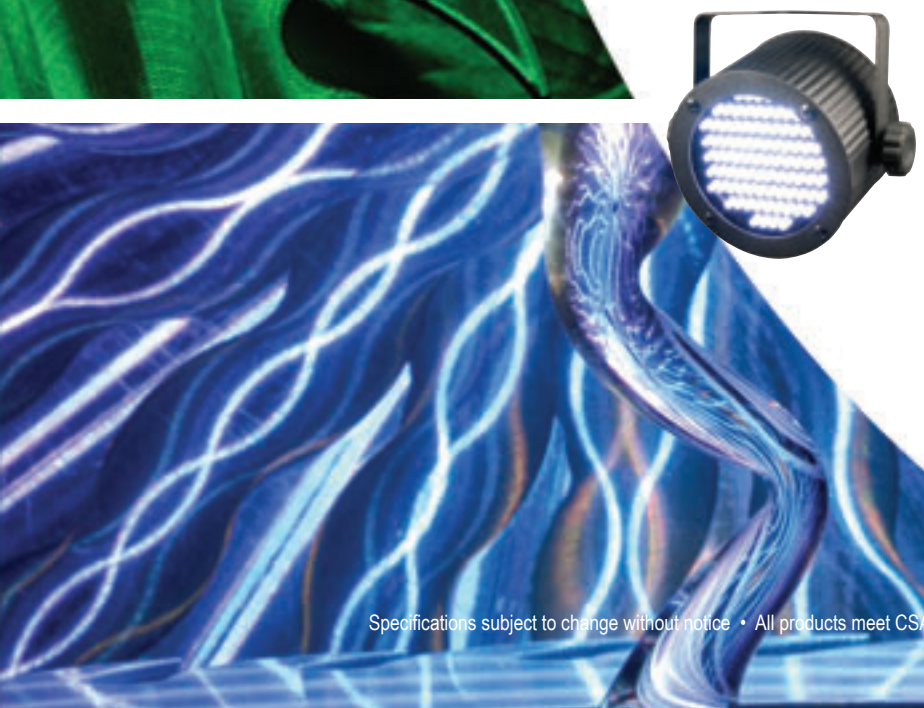

COLORboss™

LED-BOSS

- 4-channel DMX-512 LEDsplash™ 196 controller
- 7 independently selectable preset colors
- Speed and flash rate control channel
- Controls up to 20 units incrementally
- Built-in automated programs
- Built-in sound activated programs
- Power: DC 12V 500mA 115V/60Hz or 230V/50Hz
- Weight: 1.5lbs (0.7kg)
- Size: 6.5in x 2.5in x 5in
  165mm x 63mm x 127mm

LEDsplash™ 196

LED-PAR196

CONTROL FEATURES
- 7-channel DMX-512 LED wash light
- Blackout/dimming of all 7 individual circles
- Automatic built in programs with 10 selectable speeds
- 7 static colors, 5 color chases with adjustable speed and sound active mode via external controller

ADDITIONAL FEATURES
- Built-in automated programs via master/slave

SPECIFICATIONS
- Beam angle: 26° • Field angle: 52° • Lux: 807 @ 1m
- Light source: 196 (85 red, 51 green, 60 blue) LEDs
- Power and current: 120V, 60Hz: 20W, 0.2A operating, 0A inrush
- AC power: 115V/60Hz or 230V/50Hz
- Weight: 4lbs (1.8kg) • Size: 6in x 8in x 7.5in
  152mm x 203mm x 190mm

LEDsplash™ Jr.

LED-PAR83

CONTROL FEATURES
- 5-channel DMX-512 LED wash light
- Blackout/static/dimmer/strobe
- Static colors and RGB color mixing with or without DMX controller

ADDITIONAL FEATURES
- Additional power output: max. 50 units @ 120V (115V models only)
- Linkable power with other LEDrain™ and LEDsplash™ units (115V models only)
- Built-in automated programs via master/slave

SPECIFICATIONS
- Beam angle: 17° • Field angle: 52° • Lux: 538 @ 1m
- Light source: 86 (44 red, 21 green, 21 blue) LEDs
- Power and current: 120V, 60Hz: 24W, 0.2A operating, 0A inrush
- AC power: Switchable 115V/230V 50/60Hz
- Weight: 2lbs (1kg) • Size: 4.8in x 6.6in x 4in
  121mm x 168mm x 102mm

LEDrain™ 36

LED-PAR36

CONTROL FEATURES
- 2-channel DMX-512 LED narrow beam
- Blackout/static/dimmer/strobe
- Static colors and strobing with or without DMX controller

ADDITIONAL FEATURES
- Additional power output: max. 50 units @ 120V (115V models only)
- Linkable power with other LEDrain™ and LEDsplash™ units (115V models only)
- Built-in automated programs via master/slave

SPECIFICATIONS
- Beam angle: 17° • Field angle: 24° • Lux: 721 @ 1m
- Light source: 83 (white) LEDs
- Power and current: 120V, 60Hz: 24W, 0.2A operating, 0A inrush
- AC power: Switchable 115V/230V 50/60Hz
- Weight: 2.4lbs (1.1kg) • Size: 5in x 5in x 5in
  127mm x 127mm x 127mm

LEDrain™ 38 LEDrain™ 56 LEDrain™ 64

LED-PAR38 LED-PAR56 LED-PAR64

CONTROL FEATURES
- 7-channel DMX-512 LED narrow beam
- Blackout/static/dimmer/strobe
- Selector switch for sound active or automatic mode
- Static colors and RGB color mixing with or without DMX controller

ADDITIONAL FEATURES
- Additional power output: max. 50 units @ 120V (115V models only)
- Linkable power with other LEDrain™ and LEDsplash™ units (115V models only)
- Built-in automated programs via master/slave
- Built-in sound activated programs via master/slave
- Double-bracket yoke doubles as floor stand

LEDrain™ 38

SPECIFICATIONS
- Beam angle: 19°
- Field angle: 34°
- Lux: 1,119 @ 1m
- Light Source: 108 (36 red, 36 green, 36 blue) LEDs
- Power and current: 120V, 60Hz: 12W, 0.1A operating, 0.2A inrush
- AC power: Autoswitching 100V – 240V 50/60Hz
- Weight: 1.2lbs (0.5kg)
- Size: 7in x 6in x5.1in
  178mm x 152mm x 130mm

LEDrain™ 56

SPECIFICATIONS
- Beam angle: 16°
- Field angle: 25°
- Lux: 1,743 @ 1m
- Light Source: 108 (36 red, 36 green, 36 blue) 10mm LEDs
- Power and current: 120V, 60Hz: 12W 0.1A operating, 0.2A inrush
- AC power: Autoswitching 100V – 240V 50/60Hz
- Weight: 3.3lbs (1.5kg)
- Size: 10.3in x 9.3in x 7.5in
  260mm x 234mm x 191mm

LEDrain™ 64

SPECIFICATIONS
- Beam angle: 16°
- Field angle: 26°
- Lux: 3,142 @ 1m
- Light Source: 183 (61 red, 61 green, 61 blue) 10mm LEDs
- Power and current: 120V, 60Hz: 18W, 0.1A operating, 0.2A inrush
- AC power: Autoswitching 100V – 240V 50/60Hz
- Weight: 2.6lbs (1.2kg)
- Size: 11in x 10in x 8.5in
  279mm x 254mm x 216mm

New 4BAR™

INCLUDES:
- 15-channel DMX-512 LED wash light system, foot switch, tripod with bag and transport case for lights

CONTROL FEATURES
- RGB control of 4 separate lights
- Built-in automated programs via DMX
- Built-in sound activated programs DMX
- Foot switch
  - Trigger built-in static or automated programs (includes RGB fades)
  - Instantly set any program to sound active
  - Instantly blackout any program

ADDITIONAL FEATURES
- Independent positioning of each light
- Low-profile lights are 1.7in deep
- Adjustable stand from 56in to 91in

SPECIFICATIONS
- Beam angle: 21° (per light)
- Field angle: 33º (per light)
- Lux: 980 @ 1m (per light)
- Light source: 432 (144 red, 144 green, 144 blue) 10mm LEDs (108 per light)
- Power and current: 120V, 60Hz: 48W, 0.4A operating, 0.8A inrush
- AC power: Autoswitching 100V-240V 50/60Hz
- Weight: 29lbs (13.2kg) (includes footswitch)
- Size: 47in x 91in
  1193mm x 2311mm

New LED PAR 38 SYSTEM

INCLUDES:
- 4 x black LED PAR cans
- 1 x sound-activated chase controller (linkable via optional CH-DIN20 cable)
- 1 x foot switch controller
- 1 x tripod stand (7ft max)

SPECIFICATIONS
- Light source: 384 (96 red, 96 green, 96 blue, 96 yellow) LEDs
- Power and current: 120V, 60Hz: 26W, 0.3A operating, 0.2A inrush
- AC power: 115V/60Hz or 230V/50Hz
- Weight: 17.2lbs (7.8kg)
- Stand size: 84in x 41in
  2,134mm x 1,041mm

PAR CAN KIT 56

PK-PAR56C

- 2 PAR56CUL PAR cans
- 2 MFL 300W lamps
- 2 CH-05 safety cables
- 2 CLP-03 clamps
- 2 CH-GEL packs

SPECIFICATIONS
- Light source: CH-300PAR56 MFL 120V 300W lamp
- Power and current: 120V, 60Hz: 300W, 2.5A operating, 2.5A inrush
- AC power: 115V/230V 50/60Hz (based on bulb used)
- Weight: 4lbs (1.8kg) each
- Size: 14.5in x 10in x 10in
  419mm x 267mm x 267mm

PAR CAN KIT 64

PK-PAR64C

- 2 PAR64CUL polished PAR cans
- 2 MFL 500W lamps
- 2 CH-05 safety cables
- 2 CLP-03 clamps
- 2 CH-GEL packs
- Light source: CH-500PAR64 MFL 120V 500W lamp
- Power and current: 120V, 60Hz: 500W, 4.2A operating, 4.2A inrush
- AC power: 115V/230V 50/60Hz (based on bulb used)
- Weight: 4lbs (1.8kg) each
- Size: 16.5in x 10.5in x 10.5in
  368mm x 254mm x 254mm

GEL PACK

CH-GEL

- PAR 38, 56, 64 gel pack with 4 colors :
- Blue • Green • Red • Yellow
- Gel size: 10in x 10in
  254mm x 254mm

PAR 38

PAR-38B black

PAR-38C polished

- CSA/US approved
- Polished or Black
- Medium screw base
- Socket, cord w/ plug and gel frame included
- Light source: S-3458 120V 150W lamp (included)
- AC power: 115V/230V 50/60Hz (based on bulb used)
- Weight: 4lbs (1.8kg)
- Size: 10in x 6.in5 x 6.5 in
  254mm x 165mm x 165mm

New LED PAR 56-24

CONTROL FEATURES
- 7-channel DMX-512 LED narrow beam
- Blackout/static/dimmer/strobe
- Static colors and RGB color mixing with or without DMX controller

ADDITIONAL FEATURES
- High-power, 1W (400mA) LEDs
- Additional power output: max 40 units @ 120V
- Built-in automated programs via master/slave
- Built-in sound activated programs via master/slave
- Double-bracket yoke doubles as floor stand

SPECIFICATIONS
- Beam angle: 24°
- Field angle: 52°
- Lux: 2,780 @ 1m
- Light source: 24 (8 red, 8 green, 8 blue) LEDs 50,000hrs
- Power and current: 120V, 60Hz: 41W, 0.4A operating, 0.4A inrush
- AC power: Switchable 115V/230V 50/60Hz
- Weight: 7lbs (3.2kg)
- Size: 10.7in x 10.1in x 13.5in
  273mm x 256mm x 344mm

New LED PAR 64-36

CONTROL FEATURES
- 7-channel DMX-512 LED narrow beam
- Blackout/static/dimmer/strobe
- Static colors and RGB color mixing with or without DMX controller

ADDITIONAL FEATURES
- High-power, 1W (400mA) LEDs
- Additional power output: max 40 units @ 120V
- Built-in automated programs via master/slave
- Built-in sound activated programs via master/slave
- Double-bracket yoke doubles as floor stand

SPECIFICATIONS
- Beam angle: 24°
- Field angle: 52°
- Lux: 3,040 @ 1m
- Light source: 36 (12 red, 12 green, 12 blue) LEDs 50,000hrs
- Power and current: 120V, 60Hz: 40W, 0.4A operating, 0.7A inrush
- AC power: Switchable 115V/230V 50/60Hz
- Weight: 8lbs (3.2kg)
- Size: 11.6in x 11in x 14.9in
  294mm x 280mm x 378mm

ROCK-N' LITE PACK™

PK1-BANK

- 2 Color Bank™ 8 (8-lamp border, strip or cyc light)
  Functions: chase, full on, sound
- Linkable
- Built-in automated programs via master/slave
- Built-in sound activated programs via master/slave
- Light source:
  8 x JCDR 115V 50W or 8 x JCDR 230V 50W lamps/unit (16 total included)
- AC power: Switchable 115V/230V 50/60Hz
- Weight: 13lbs (5.8kg)
- Size: 3.5in x 19in x 7.5in (89mm x 489mm x 191mm)
- 16 colored gels: 4 red, 4 green, 4 blue and 4 yellow
- 2 CH-06SP tripod stands (6ft. fully extended)
- CBFS Color Bank™ foot switch controller
- CHDIN20 - 66ft. linking cable

DJ Bank New

- Compact border, strip or cyc light

FOR COMPLETE SPECIFICATIONS SEE PAGE 45

FOLLOWSPOT 400G

TFX-FS360

CONTROL FEATURES
- 2-channel DMX-512 followspot
- 7 dichroic colors + white: red, blue, green, yellow, orange, magenta, UV purple
- Variable electronic dimmer (0-100%)
- Variable mechanical iris
- Variable mechanical focus

ADDITIONAL FEATURES
- Single gobo slot
- 4 gobos included

SPECIFICATIONS
- Gobo size: 35.8mm outside, 27.9mm inside
- Beam angle: 2º - 12º
- Lux: 48,420 @ 1m
- Light source: ENX 82V 360W lamp 75hrs
- Power and current: 120V, 60Hz: 326W, 3A operating, 8.2A inrush, PF 0.92
- AC power: 115V/60Hz or 230V/50Hz
- Weight: 20.6 lbs (9.3kg)
- Size: 22.5in x 11.5in x 6.4in
  572mm x 292mm x 162mm

OPTIONS
- Followspot stand (CH-W28) see page 68

Shown with optional Follow Spot Stand (CH-W28) (page 68)

You can rei[illegible]nt the wheel!

Awesome Vue™

Retro meets [illegible]

DMX Effects

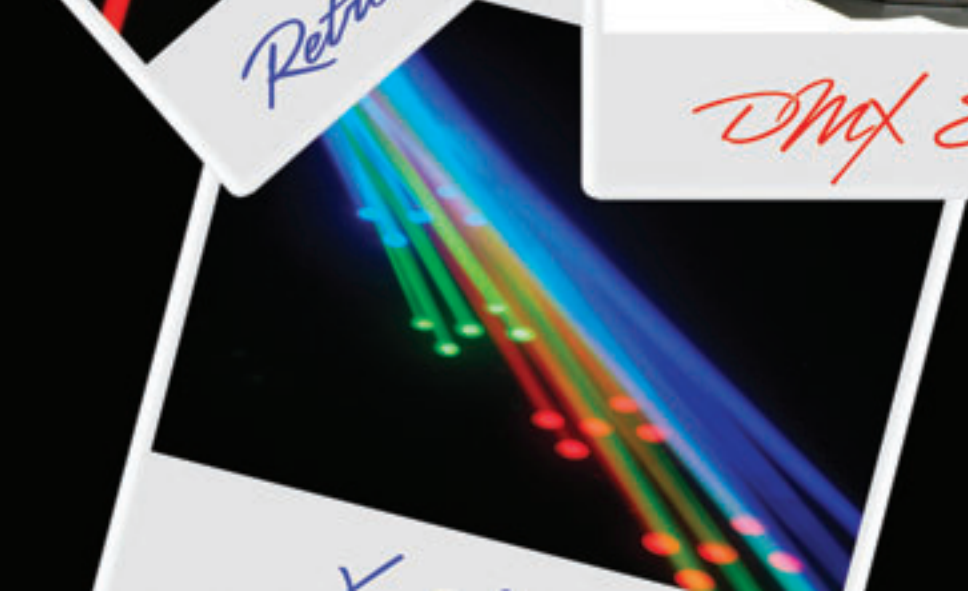

New Vue™ 1.1

CONTROL FEATURES
- 6-channel DMX-512 LED moonflower
- Individual control of red, green and blue LEDs
- Built-in automated programs via master/slave or DMX
- Built-in sound activated programs via master/slave or DMX

ADDITIONAL FEATURES
- Adjustable hanging bracket with slide rail
- Linkable with the Vue™ 6.1 (page 41)

SPECIFICATIONS
- Coverage angle: 34°
- Light source: 84 (36 red, 24 green, 24 blue) LEDs
- Power and current: 19W, 0.2A operating, 0.4A inrush
- AC power: Switchable 115V/230V 50/60Hz
- Weight: 5lbs (2.3kg)
- Size: 10in x 8.5in x 7.5in
  254mm x 216mm x 190mm

New Vue™ 2.1

CONTROL FEATURES
- 6-channel DMX-512 LED moonflower
- Individual control of red, green and blue LEDs
- Built-in automated programs via master/slave or DMX
- Built-in sound activated programs via master/slave or DMX

ADDITIONAL FEATURES
- Contains red, green, blue, white and amber LEDs
- Adjustable hanging bracket with slide rail
- Additional power output: max 26 units @ 120V

SPECIFICATIONS
- Coverage angle: 47°
- Light source:
  162 (45 red, 33 green, 39 blue, 24 white, 21 amber) LEDs
- Power and current: 120V, 60Hz: 30W, 0.3A operating,1.1A inrush
- AC power: Autoswitching 100V – 240V 50/60Hz
- Weight: 7lbs (3.2kg)
- Size: 9.5in x 12.5in x 11in
  241mm x 318mm x 279mm

Vue™ 3.1

New

CONTROL FEATURES
- 9-channel DMX-512 LED moonflower
- Blackout/static/strobe
- Individual control of red, green and blue LEDs within each cluster (7 total)
- Built-in automated programs via DMX
- Built-in sound activated programs via DMX

ADDITIONAL FEATURES
- Creates fireworks-like projections
- Adjustable hanging bracket with slide rail
- Additional power output: max. 50 units @ 120V

SPECIFICATIONS
- Coverage angle: 60°
- Light source: 392 (224 red, 63 green, 105 blue) LEDs
- Power and current: 120V, 60Hz: 24W, 0.2A operating, 0.4A inrush
- AC power: Autoswitching 100V – 240V 50/60Hz
- Weight: 8lbs (3.6kg)
- Size: 10.7in x 12.3in x 10.6in
  273mm x 312mm x 271mm

Vue™ 4.1

New

CONTROL FEATURES
- 9-channel DMX-512 LED rotating moonflower
- Individual control of red, green, blue, white and amber LEDs within each cluster (6 total)
- Variable speed of motor
- Built-in automated programs via DMX
- Built-in sound activated programs via master/slave or DMX

ADDITIONAL FEATURES
- Adjustable hanging bracket with slide rail
- Additional power output: max. 25 units @ 120V

SPECIFICATIONS
- Coverage angle: 46°
- Light source: 282 (66 red, 90 green, 66 blue, 18 white, 42 amber) LEDs
- Power and current: 120V, 60Hz: 36W, 0.3A operating, 0.2A inrush
- AC power: Autoswitching 100V – 240V 50/60Hz
- Weight: 7.5lbs (3.4kg)
- Size: 11.3in x 12.4in x 10.4in
  286mm x 315mm x 264mm

Vue™ 6.1

New

CONTROL FEATURES
- 6-channel DMX-512 rotating LED moonflower
- Blackout/static/strobe
- Individual control of red, green and blue LEDs within each cluster (3 total)
- Built-in automated programs via master/slave or DMX
- Built-in sound activated programs via master/slave or DMX

ADDITIONAL FEATURES
- Adjustable hanging bracket with slide rail
- Additional power output: max. 20 units @ 120V
- Linkable with the Vue™ 1.1 (page 39)

SPECIFICATIONS
- Coverage angle: 110°
- Light source: 252 (108 red, 72 green, 72 blue) LEDs
- Power and current: 120V, 60Hz: 40W, 0.3A operating, 0.4A inrush
- AC power: Autoswitching 100V – 240V 50/60Hz
- Weight: 7.1lbs (3.2kg)
- Size:13in x 13in x 13in
  330mm x 330mm x 330mm

élan™

CONTROL FEATURES
- 4-channel DMX-512 rotating LED effect light
- Blackout/static/strobe
- Individual control of red, green and blue LEDs

ADDITIONAL FEATURES
- Built-in automated programs via master/slave
- Built-in sound actived programs via master/slave
- 2 built-in microphones: 1 for LEDs, 1 for motor
- 2 sound sensitivity knobs: 1 for LEDs, 1 for motor
- Additional power output: max. 20 units @ 120V

SPECIFICATIONS
- Beam angle: 70°
- Light source: 224 (88 red, 48 green, 88 blue) LEDs
- Power and current: 120V, 60Hz: 36W, 0.3A operating, 0.2A inrush
- AC power: Switchable 115V/230V 50/60Hz
- Weight: 11lbs (5kg)
- Size: 16in x 11in x 11in
  406mm x 279mm x 279mm

DERBY X™

New

CONTROL FEATURES
- 8-channel DMX-512 LED derby effect
- Individual control of red, green and blue LEDs within each cluster (6 total)
- Built-in automated programs via master/slave or DMX
- Built-in sound activated programs via master/slave or DMX

ADDITIONAL FEATURES
- Mount multiple units together with adjustable, optional bracket (XBRACKET)
- Additional power output: max. 27 units @ 120V

SPECIFICATIONS
- Coverage angle: 96°
- Light source: 90 (30 red, 30 green, 30 blue) LEDs
- Power and current: 120V, 60Hz: 24W, 0.2A operating, 0.2A inrush
- AC power: Autoswitching 100V – 240V 50/60Hz
- Weight: 4lbs (1.8kg)
- Size: 11.9in x 15in x 7.4in
  302mm x 382mm x 187mm

Double Derby™X, Derby™X & Kinta™X units attached using the X-bracket

DOUBLE DERBY X™

New

CONTROL FEATURES
- 2-channel DMX-512 LED derby effect
- Continuous rotation or back and forth motor control
- Built-in automated programs via master/slave or DMX
- Built-in sound activated programs via master/slave or DMX

ADDITIONAL FEATURES
- High-power, 3W (730mA) LEDs
- Linkable with LED Mushroom and Kinta™ X (page 43)
- Mount multiple units together with adjustable, optional bracket (XBRACKET)
- Additional power output: max. 37 units @ 120V

SPECIFICATIONS
- Coverage angle: 132°
- Light source: 3 (1 red, 1 green, 1 blue) LEDs
- Power and current: 120V, 60Hz: 24W, 0.2A operating, 0.6A inrush
- AC power: Autoswitching 100V – 240V 50/60Hz
- Weight: 6lbs (2.7kg)
- Size: 11.1in x 11.7in x 10.4in
  283mm x 297mm x 264mm

KINTA X™

New

CONTROL FEATURES
- 2-channel DMX-512 LED derby effect
- Continuous rotation or back and forth motor control
- Built-in automated programs via master/slave or DMX
- Built-in sound activated programs via master/slave or DMX

ADDITIONAL FEATURES
- High-power, 3W (730mA) LEDs
- Linkable with LED Mushroom and Double Derby™ X (page 42)
- Mount multiple units together with adjustable, optional bracket (XBRACKET)
- Additional power output: max. 37 units @ 120V

SPECIFICATIONS
- Coverage angle: 135°
- Light source: 3 (1 red, 1 green, 1 blue) LEDs
- Power and current: 120V, 60Hz: 24W, 0.2A operating, 0.5A inrush
- AC power: Autoswitching 100V – 240V 50/60Hz
- Weight: 6lbs (2.7kg)
- Size: 11.1in x 11.7in x 10.4in
  283mm x 297mm x 264mm

LED MUSHROOM™

New

CONTROL FEATURES
- 2-channel DMX-512 LED derby effect
- Continuous rotation or back and forth motor control
- Built-in automated programs via master/slave or DMX
- Built-in sound activated programs via master/slave or DMX

ADDITIONAL FEATURES
- High-power, 3W (730mA) LEDs
- Linkable with Kinta™ X and Double Derby™ X (page 42)
- Additional power output: max. 37 units @ 120V

SPECIFICATIONS
- Coverage angle: 130°
- Light source: 3 (1 red, 1 green, 1 blue) LEDs
- Power and current: 120V, 60Hz: 24W, 0.2A operating, 0.5A inrush
- AC power: Autoswitching 100V – 240V 50/60Hz
- Weight: 5.4lbs (2.4kg)
- Size: 12in x 8.1in x 8.7in
  306mm x 206mm x 221mm

Pure White

Never Fails

Twice the coverage

Effects

it's as easy as being there

J-FIVE™

- Dual rotating LED moonflower effect
- Dual rocker switches: 1 for LEDs, 1 for motors
  Sound-activated
  Static (motors only)
  Automatic
- Additional power output: max 50 units @ 120V
- Beam angle: 81°
- Light source: 112 (32 red, 48 green, 32 blue) LEDs
- Power and current: 120V, 60Hz: 16W, 0.1A operating, 0.2A inrush
- AC power: Switchable 115V/230V 50/60Hz
- Weight: 6lbs (2.7kg)
- Size: 9.8in x 9.5in x 7.8in
  249mm x 241mm x 198mm

New DJ Bank

- Compact border, strip or cyc light
- Sound-activated
- Fully automatic
- Beam angle: 12°
- Field angle: 24°
- Light source: 140 (35 red, 35 green, 35 blue, 35 yellow) LEDs
- AC power: 115V/60Hz or 230V/50Hz
- Weight: 2.7lbs (1.2kg)
- Size: 15.8in x 4.5in x 5.5in
  401mm x 114mm x 140mm

LXW™ New

- LED moonflower effect
- Selectable functions: sound, static, continuous
- Additional power output: max 80 units @ 120V
- High-power, 3W (750mA) LED
- Coverage angle: 39°
- Light source: 1 (white) LED
- Power and current: 120V, 60Hz: 11W, 0.1A operating, 0.1A inrush
- AC power: Switchable 115V/230V 50/60Hz
- Weight: 3.1lbs (1.4kg)
- Size: 9.5in x 5.2in x 7.7in
  242mm x 132mm x 195mm

LX10™

- LED moonflower effect
- Mirror scans 180°
- Selectable functions: sound, rotating
- Additional power output: max. 50 units @ 120V
- Beam angle: 59°
- Light source: 57 (17 red, 24 green, 16 blue) LEDs
- Power and current: 120V, 60Hz: 12W, 0.1A operating, 0.1A inrush
- AC power: Switchable 115V/230V 50/60Hz
- Weight: 5lbs (2.3kg)
- Size: 15.5in x 5.3in x 8.5in
  394mm x 135mm x 216mm

LX5™

- LED moonflower effect
- Selectable functions: sound, rotating
- Additional power output: max. 50 units @ 120V
- Beam angle: 43°
- Light source: 57 (17 red, 24 green, 16 blue) LEDs
- Power and current: 120V, 60Hz: 8W, 0.1A operating, 0.1A inrush
- AC power: Switchable 115V/230V 50/60Hz
- Weight: 3.5lbs (1.6kg)
- Size: 8.8in x 5.3in x 8.5in
  224mm x 135mm x 216mm

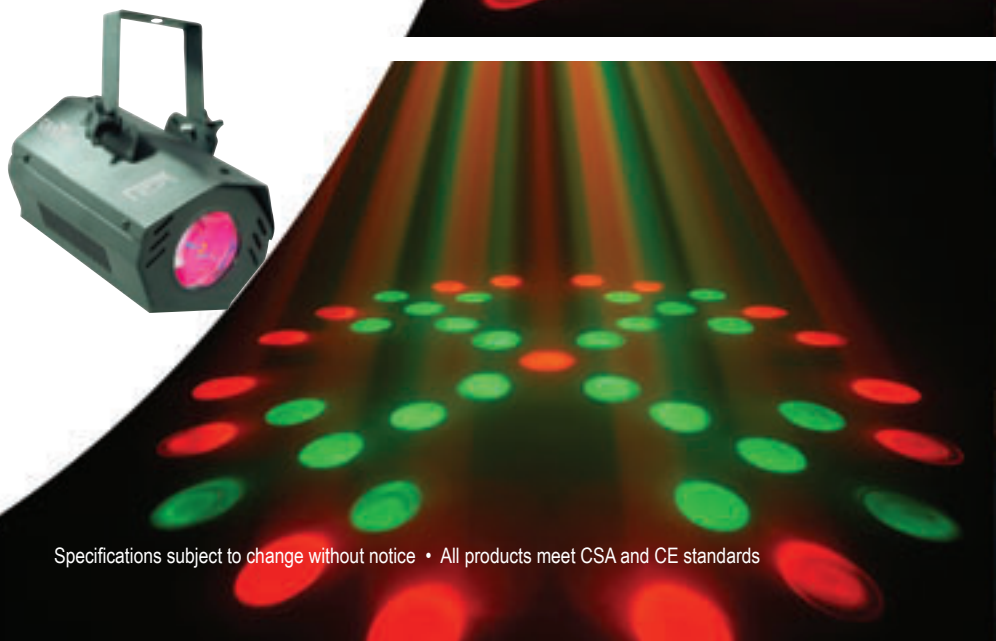

SX™ ABYSS

- Simulated rippling water effect
- 4 constantly changing dichroic colors
- Stop effect on a color
- Adjustable ripple speed
- Electronic transformer
- Beam angle: 44°
- Light source: ELC3 24V 250W lamp
- AC power: 115V/60Hz or 230V/50Hz
- Weight: 8.7lbs (4kg)
- Size: 13in x 12.5in x 7in
  330mm x 318mm x 178mm

DOUBLE DERBY™

CH-310

- 20 multicolored lenses, 40 rotating, crisscrossing beams
- Sound-activated
- Light source: 2 x 64514 120V 300W (115V)
  or 2 x 264514 120V 300W (230V) in series lamps
- AC power: Switchable 115V/230V 50/60Hz
- Weight: 18.7lbs (8.3kg)
- Size: 15in x 14in x 12in
  381mm x 356mm x 305mm

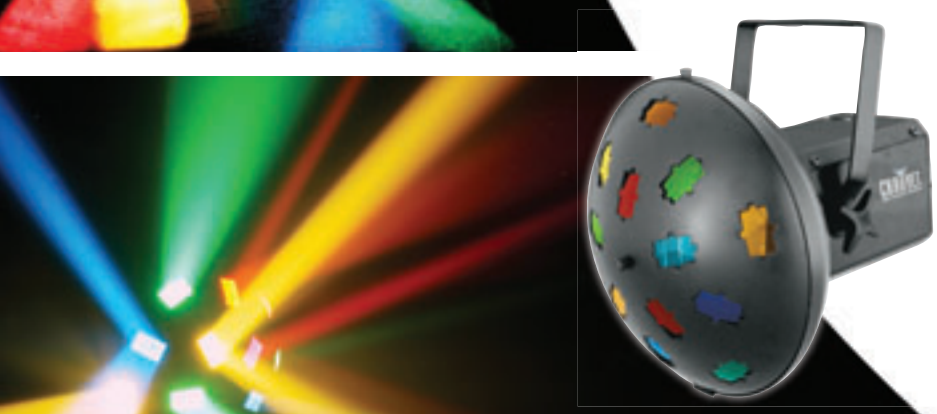

MUSHROOM™

CH-250

- 30 multicolored lenses, 60 rotating, crisscrossing beams
- Sound-activated
- Light source: 2 x 64514 120V 300W (115V)
  or 2 x 64514 120V 300W (230V) in series lamps
- AC power: Switchable 115V/230V 50/60Hz
- Weight: 10.4lbs (4.72kg)
- Size: 14in x 11in x 11in
  356mm x 279mm x 279mm

CYBORG™

CH-258

- 8 multicolored lenses, 30 beams rotate and crisscross back and forth
- Sound-activated
- Light source: 2 x 64514 120V 300W (115V) or
  2 x 64514 120V 300W (230V) in series lamps
- AC power: Switchable 115V/230V 50/60Hz
- Weight: 11lbs (5kg)
- Size: 16in x 11in x 11in
  406mm x 279mm x 279mm

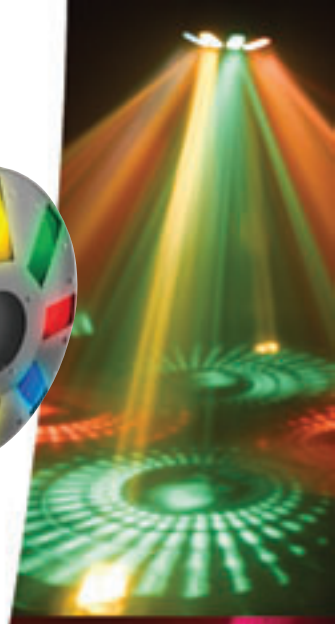

COSMOS™ 2.1

CH-302B

- Flash/full-on, flash speed, rotation speed, 360° rotation on both axis
- 2 fixture cover styles: sphere & chopper
- 74 multicolored lenses, 74 beams, 24 free additional clear lenses
- Centered rigging point for single clamp mount
- Light source: 2 x 64514 120V 300W (115V)
  or 2 x 64514 120V 300W (230V) in series lamps
- AC power: Switchable 115V/230V 50/60Hz
- Weight: 12.5lbs (5.6kg)
- Size: 8.5in x 17in x 14in
  216mm x 432mm x 356mm

LINE DANCER™

CH-300

- 48 multicolored lenses, 144 beams
- Rotating beams crisscross back and forth
- Sound-activated
- Light source: 3 x EHM 120V 300W
  or 3 x EHM2 230V 300W lamps
- AC power: Switchable 115V/230V 50/60Hz
- Weight: 16.6lbs (7.5kg)
- Size: 17in x 11in x 11in
  432mm x 279mm x 279mm

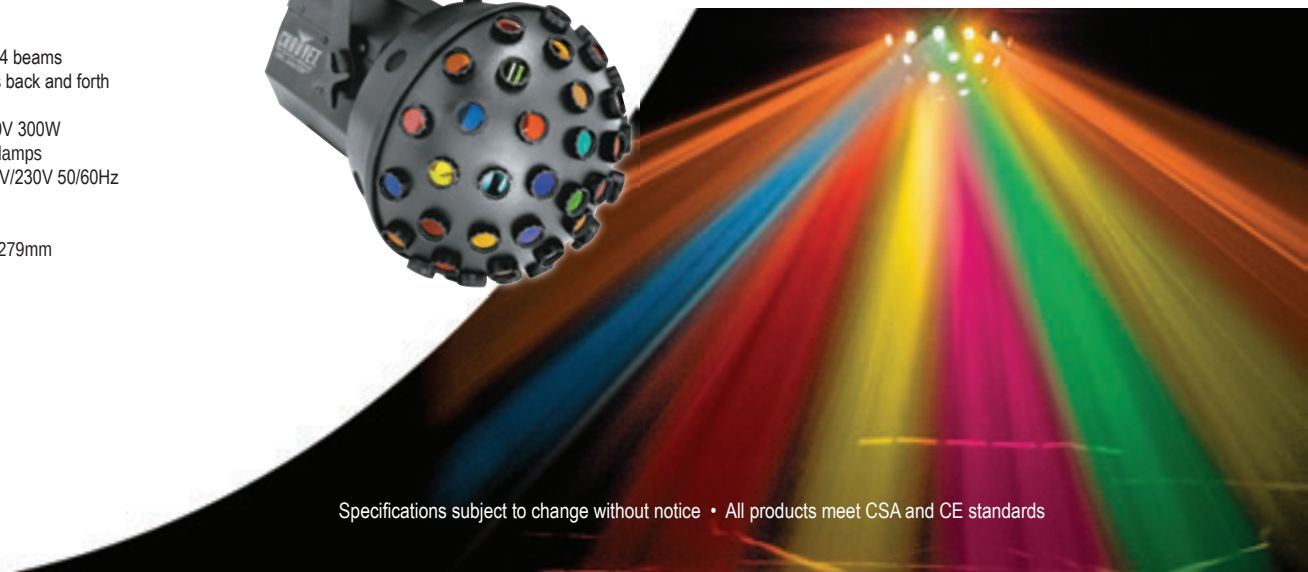



MINI MOON™

CH-202B

- Selectable functions: sound, rotating or static
- White & colored moonflower dishes
- 4 colored gels included
- Light source: BRL 12V 50W lamp
- AC power: Switchable 115V/230V 50/60Hz
- Weight: 7.8lbs (3.5kg)
- Size: 10in x 4.5in x 55.5in
  254mm x 114mm x 140mm

- Remote Speed Controller included

MINI SPHERE™

CH-260

- 62 multicolored lenses, 62 beams
- 360° rotation
- Adjustable speed
- Remote speed controller included
- Light source: 64514 120V 300W or 64516 230V 300W lamp
- AC power: Switchable 115V/230V 50/60Hz
- Weight: 7.7lbs (3.5kg)
- Size: 13in x 8in x 8in
  330mm x 203mm x 203mm

MINI LINE DANCER™

CH-215A

- 26 multicolored lenses, 78 beams
- Rotating beams crisscross back and forth
- Sound-activated
- Light source: 3 x J120V 100W or 3 x J230V 100W lamps
- AC power: Switchable 115V/230V 50/60Hz
- Weight: 6.4lbs (2.9kg)
- Size: 10.5in x 7.5in x 7.5in
  267mm x 191mm x 191mm

That's Hot

Mak

Power!

Specialty Effects

L-UV it

SCORPION GRAFX

CONTROL FEATURES
- 14-channel DMX-512 moving yoke graphic green laser
- Pan: 510° / Tilt: 260°
- Operating modes: auto, sound activation, master/slave, DMX, ILDA or GrafXpress™
- 9 pages of 48 cues yield 432 cues onboard
- Adjustable pattern size, scan (X/Y) location, pattern speed and zoom
- Laser on/off via DMX

ADDITIONAL FEATURES
- Custom text, patterns and animated graphics via GrafXpress™
- Powered by Pangolin® Control Systems
- High-speed precision Galvo 12K scanners
- Dual hanging brackets with 1/4-turn fasteners

SPECIFICATIONS
- Light source: 532nm/4.95mW green laser module
- Power and current: 120V, 60Hz: 66W, 0.6A operating, 1A inrush
- AC power: Switchable 115V/230V 50/60Hz
- Weight: 13.2lbs (6kg)
- Size: 9.6in x 9.4in x 12.8in
  245mm x 238mm x 325mm

OPTIONS
- Software-based GrafXpress™ controller

GrafXpress

- 9-channel DMX-512 Scorpion™ GrafX controller
- Live control of laser via USB
- Controls audio, speed, size of pattern, rotation, page, cue
- Download user-created animations (cues) to controller
- Stores 9 pages of 48 cues (432 cues total) onboard without computer
- X/Y gain and offset wheels
- Animation speed channel
- Powered by Pangolin®
- Includes Windows®-based user interface and software to create custom animations, graphics and/or text
- Pull in bitmaps behind the tracing window
- Access to quick animations
- Change geometry and laser settings
- RCA audio input and ILDA DB-25 (dual output) male/female connections
- 2-space (2U) rack mount
- AC power: Autoswitching 100V – 220V 50/60Hz
- Weight: 2lbs (0.9kg)
- Size: 19in x 10in x 3.5in
  483mm x 254mm x 89mm

SCORPION™ STORM

New

CONTROL FEATURES
- 3-channel DMX-512 controlled green laser
- Operating modes: auto, sound activation, DMX
- Motor rotation speed and direction adjustments
- Laser on/off & stand alone via DMX
- Built-in automated programs via DMX
- Built-in sound activated programs via dipswitches or DMX
- Manual program selection via dipswitches

ADDITIONAL FEATURES
- Complies with FDA / CDRH standards for Class IIIa
- Creates a unique laser star field effect with hundreds of beams
- Additional power output: max 26 units @ 120V

SPECIFICATIONS
- Coverage angle: 82°
- Light source: 532nm/50mW green laser module
- Power and current: 120V, 60Hz: 25W, 0.3A operating, 0.7A inrush
- AC power: Switchable 115V/230V 50/60Hz
- Weight: 11lbs (5kg)
- Size: 13.5in x 8.5in x 8.5in
  343mm x 216mm x 216mm

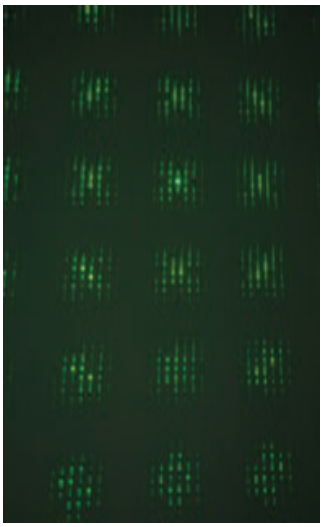

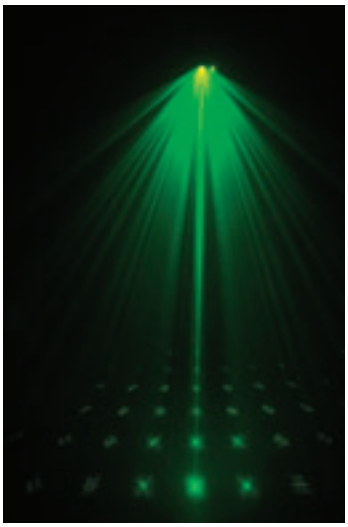

New SCORPION™ STORM RG

CONTROL FEATURES
- 4-channel DMX-512 controlled red and green laser
- Operating modes: auto, sound activation, DMX
- Motor rotation speed and direction adjustments
- Laser on/off & stand alone via DMX
- Color selection: red, green or both red & green (with strobe control)
- Built-in automated programs via DMX
- Built-in sound activated programs via dipswitches or DMX
- Manual program selection via dipswitches

ADDITIONAL FEATURES
- Complies with FDA / CDRH standards for Class IIIa
- Creates a unique laser star field effect with hundreds of beams
- Additional power output: max 26 units @ 120V

SPECIFICATIONS
- Coverage angle: 82°
- Light source: 532nm/40mW green laser module, 650nm/60mW red laser module
- Power and current: 120V, 60Hz: 25W, 0.3A operating, 0.7A inrush
- AC power: Switchable 115V/230V 50/60Hz
- Weight: 11lbs (5kg)
- Size: 13.5in x 8.5in x 8.5in
  343mm x 216mm x 216mm

WITH FAT BEAM TECHNOLOGY

SCORPION™ SCAN

LG-60

CONTROL FEATURES
- 7-channel DMX-512 green laser
- Pan: 66º / Tilt: 47º
- Operating modes: auto, sound activation, master/slave
- 51 dynamic and 52 static patterns
- Dynamic scan and pattern speed adjustment
- Static pattern size and X/Y position adjustment
- Scan and speed adjustments yield 500 laser effects
  74 patterns in sound activation mode
  52 patterns in auto mode
- Laser on/off & stand alone via DMX
- Built-in automated programs via master/slave or DMX
- Built-in sound activated programs via master/slave or DMX

ADDITIONAL FEATURES
- 10mW Fat Beam™ laser produces 10-14mm beams, which complies with IEC Safety Standards under ClassIIIA
- Safety cover for scanner mirrors

SPECIFICATIONS
- Light source: 532nm/10mW green laser module
- Power and current: 120V, 60Hz: 20W, 0.2A operating, 0.2A inrush
- AC power: Switchable 115V/230V 50/60Hz
- Weight: 9.4lbs (4.3kg)
- Size: 10in x 10in x 5in
  256mm x 256mm x 130mm

WITH FAT BEAM TECHNOLOGY

SCORPION™ RG

LRG-55

CONTROL FEATURES
- 8-channel DMX-512 red and green laser
- Pan: 66º / Tilt: 47º
- Operating modes: auto, sound activation, master/slave
- 41 dynamic and 50 static patterns
- Dynamic scan and pattern speed adjustment
- Static pattern size and X/Y position adjustment
- Scan and speed adjustments yield 500 laser effects
  44 patterns in sound activation mode
  48 patterns in auto mode
- Color selection: red, green or both red & green
- Built in automated programs via master/slave or DMX
- Built-in sound activated programs via master/slave or DMX

ADDITIONAL FEATURES
- Dual 10mW Fat Beam™ lasers produce 10-14mm beams, which complies with IEC Safety Standards under ClassIIIA
- Safety cover for scanner mirrors

SPECIFICATIONS
- Light source: 532nm/10mW green laser module and 650nm/10mW red laser module
- Power and current: 120V, 60Hz: 25W, 0.2A operating, 0.2A inrush
- AC power: Switchable 115V/230V 50/60Hz
- Weight: 9.4lbs (4.3kg)
- Size: 10in x 10in x 5in
  256mm x 256mm x 130mm

Specifications subject to change without notice • All products meet CSA and CE standards

Wireless Remote included

FAT BEAM™

WITH FAT BEAM TECHNOLOGY
SCORPION™
LGX
LG-3355

- Operating modes: auto, sound activation, master/slave
- 80 preset patterns
- Free wireless remote and 14.7ft linking cable included (max. 8 units)
- Laser on/off, auto, sound activation and static patterns via the wireless remote
- 10mW Fat Beam™ laser produces 10-14mm beams, which complies with IEC Safety Standards under ClassIIIA
- Built-in automated programs via master/slave
- Built-in sound activated programs via master/slave
- Wireless remote included
- Light source: 532nm/10mW green laser module
- Power and current: 120V, 60Hz: 20W, 0.2A operating, 0.2A inrush
- AC power: Switchable 115V/230V 50/60Hz
- Weight: 8lbs (3.6kg)
- Size: 10.5in x 9.5in x 7in
  266mm x 241mm x 178mm

FAT BEAM™

WITH FAT BEAM TECHNOLOGY
SCORPION™
SKY

CONTROL FEATURES
- 6-channel DMX-512 green laser
- Pan: 66° / Tilt: 47°
- Operating modes: auto, sound activation, master/slave
- 35 dynamic and static patterns
- Dynamic scan and pattern speed adjustment
- Static pattern size and X/Y position adjustment
- Scan and speed adjustment
- Laser on/off & stand alone via DMX
- Built-in automated programs via master/slave or DMX
- Built-in sound activated programs via master/slave or DMX

ADDITIONAL FEATURES
- 10mW Fat Beam™ laser produces10-14mm beams, which complies with IEC Safety Standards under ClassIIIA
- Additional power output: max 22 units @ 120V

SPECIFICATIONS
- Light source: 532nm/10mW green laser module
- Power and current: 120V, 60Hz: 23W, 0.2A operating, 0.4A inrush
- AC power: Switchable 115V/230V 50/60Hz
- Weight: 8.7lbs (3.9kg)
- Size: 11in x 8.3in x 6.5in
  279mm x 211mm x 165mm

SCORPION™ G

- Operating modes: automatic, sound activation,master/slave, manual
- 90 preset patterns
- Pattern and speed knobs for automatic mode
- Includes AC adaptor and 14.7ft linking cable (max. 8 units)
- Built-in automated programs via master/slave
- Built-in sound activated programs via master/slave
- Safety cover for scanner mirrors
- Light source: 532nm/4.95mW green laser module
- Power and current: 120V, 60Hz: 8W, 0A operating, 0A inrush
- AC power: DC 12V 500mA 115V/60Hz or 230V/50Hz
- Weight: 4lbs (1.8kg)
- Size: 7in x 7in x 5in
  180mm x 170mm x 130mm

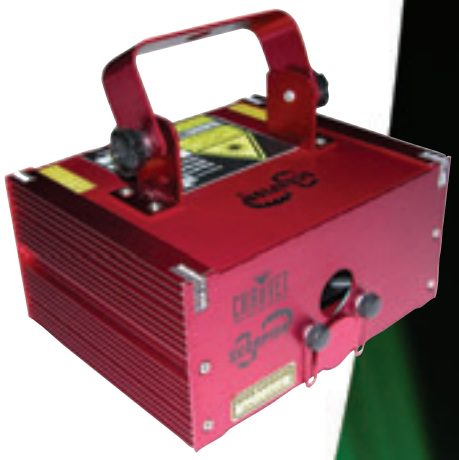

SCORPION™ SERIES

LED Shadow™

CONTROL FEATURES
- 3-channel DMX-512 LED UV blacklight
- Blackout/static/dimmer/strobe
- Adjustable flash rate, dimmer and static in stand-alone via dipswitches
- Built-in automated programs via master/slave or DMX
- Built-in sound activated programs via master/slave or DMX

ADDITIONAL FEATURES
- Coverage up to 20ft x 20ft (facing down)
- Linkable with LED Techno Strobe™ & LED Techno Strobe™ RGB (page 27), LEDsplash™ 200B, LEDsplash™ 2 (page 30) & LEDsplash™ 152B (page 30) in stand-alone
- Additional power output: max 50 units @ 120V
- Includes brackets for wall and truss mounting

SPECIFICATIONS
- Beam angle: 28°
- Wavelength: 405nm
- Light source: 192 (UV) LEDs
- Power and current: 120V, 60Hz: 12W, 0.1A operating, 0.2A inrush
- AC power: Autoswitching 100V - 240V 50/60Hz
- Weight: 4.9lbs (2.2kg)
- Size: 14in x 9.8in x 6.5in

BLACK SHADOW™

TFX-BL400

- High-powered 400-watt blacklight cannon
- Coverage up to 70ft x 60ft
- Light source: H400BL 400W lamp
- AC power: 115V or 230V
- Weight: 29.3lbs (13.3kg)
- Size: 14.8in x 15.3in x 16.3in
  375mm x 388mm x 413mm

18" AUTO-START COMPLETE BLACKLIGHT

NVF-18

- UL-approved, complete with reflector
- On/off switch
- Light source: F15BLB 15-watt lamp
- AC power: 115V/60Hz
- Weight: 1.9lbs (.9kg)
- Size: 18in x 3.5in x 1.5in
  457mm x 89mm x 38mm

HANDHELD BLACKLIGHT W/ FLASHLIGHT

NV-F4

- UL-approved handheld blacklight / flashlight
- Light source: NVF4T5BLB and SB-5 (for flashlight)
- Power: 6V
- Requires 4 x AA batteries (not included)
- Weight: .3lb (.1kg)
- Size: 6in x 5in x 2in
  152mm x 127mm x 51mm

DMX MEGA STROBE™ II

ST-800X

- 2-channel, 750-watt DMX-512 strobe light
- Flash rate: 1-20fps
- Variable electronic dimmer (0-100%)
- Manual dimmer and flash rate knobs
- Light source: CH-750B lamp
- AC power: 115V/60Hz or 230V/50Hz
- Weight: 5.8lbs (2.6kg)
- Size: 12in x 5in x 7.75in
  304mm x 127mm x 197mm

MEGA STROBE™ III

ST-750

- 750 watts
- Manual dimmer and flash rate knobs (1-20fps)
- Linkable via mono cable (EST-10MONO)
- Chasing via optional controller
- DMX via optional converter
- Light source: CH-750B lamp
- AC power: 115V/60Hz or 230V/50Hz
- Weight: 5lbs (2.3kg)
- Size: 12in x 5in x 7.75in
  304mm x 127mm x 197mm

OPTIONS
- Strobe Controller (CH-751)

TECHNO STROBE™ 2000S

ST-2000S

- 75 watts, 1-20fps
- 2-position switch: Sound activation, Manual speed
- Linkable via mono cable (EST-10MONO)
- Chasing via optional controller
- DMX via optional converter
- Light source: CH-1000B lamp
- AC power: Switchable 115V/230V 50/60Hz
- Weight: 7.85lbs (3.5kg)
- Size: 10.5in x 8.5in x 8.5in
  267mm x 216mm x 216mm

OPTIONS
- Strobe Controller (CH-751)

STROBE CONTROLLER

CH-751

- Controls up to 6 mono strobes
- On/off switch
- Bump button for temporary flashes
- Sound activation and speed control
- Includes 33ft EST-10MONO cable
- AC power: Switchable 115V/230V 50/60Hz
- Weight: 1.4lbs (0.6kg)
- Size: 6in x 3in x 2.5in
  152mm x 76mm x 64mm

MINI STROBE

CH-730

- 35 watts, 1-12fps
- AC power: 115V/60Hz or 230V/50Hz
- Weight: 0.7lb (.3kg)
- Size: 5in x 3.3in x 2in
  127mm x 83mm x 51mm

It's all about atmospher

bubbles!

Bubble

Atmospheric Effects

Better than

HURRICANE™ 1800 FLEX

New

CONTROL FEATURES
- 1-channel DMX-512 flexible fog machine
- Output: 25,000cfm

ADDITIONAL FEATURES
- Manually adjustable output angles (180°)
- 3-pin and 5-pin DMX connections
- Wired timer remote included
- Manual fog button
- 5L tank capacity
- 10-minute heat up
- Low fluid indicator and auto shutdown
- LED-illuminated tank
- Water-based fogger

SPECIFICATIONS
- Breaker size: 15A
- Fluid consumption: 125ml/minute
- Power and current: 120V, 60Hz: 1364W, 11.9A operating, 11.7A inrush, PF 0.99
- AC power: 115V/60Hz or 230V/50Hz
- Weight: 27.6lbs (12.5kg)
- Size: 23in x 13.6in x 14.7in
  585mm x 347mm x 374mm

OPTIONS
- Wireless remote (FC-W)

Wireless Remote (FC-W)

Wired Timer Remote included

Wired Timer Remote included

HURRICANE™ 1300 New

- Output: 20,000cfm
- 3.3L tank capacity
- 5-minute heat up
- Manual fog button
- Low fluid indicator and auto shutdown
- LED-illuminated tank
- Wired timer remote included
- Water-based fogger
- Fluid consumption: 125ml/minute
- AC power: 115V/60Hz or 230V/50Hz
- Power and current: 120V, 60Hz: 1,328W, 11.2A operating, 11.2A inrush, PF 0.99
- Weight: 16.8lbs (7.6kg)
- Size: 16.5in x 10in x 8.6in
  419mm x 254mm x 128mm

OPTIONS
- Wireless remote (FC-W)

Wireless Remote (FC-W)

Wired Remote included

HURRICANE™ 1100 New

- Output: 8,000cfm
- 1.3L tank capacity
- 5-minute heat up
- Manual fog button
- Low fluid indicator and auto shutdown
- LED-illuminated tank
- Wired remote included
- Water-based fogger
- Fluid consumption: 47ml/minute
- AC power: 115V/60Hz or 230V/50Hz
- Power and current: 120V, 60Hz: 774W, 5.9A operating, 6.5A inrush, PF 0.99
- Weight: 8.4lbs (3.8kg)
- Size: 9.7in x 7.1in x 6.6in
  246mm x 180mm x 168mm

OPTIONS
- Wired timer remote (FC-T)
- Wireless remote (FC-W)

Wired Timer Remote (FC-T)

Wireless Remote (FC-W)

HURRICANE™ 900

New

Wired Remote included

- Output: 4,000cfm
- 1.3L tank capacity
- 5-minute heat up
- Manual fog button
- Wired remote included
- LED-illuminated tank
- Water-based fogger
- Fluid consumption: 65ml/minute
- Power and current: 120V, 60Hz: 404W, 3.3A operating, 3.3A inrush, PF 1.00
- AC power: 115V/60Hz or 230V/50Hz
- Weight: 7.7lbs (3.5kg)
- Size: 9.7in x 8.9in x 8.6in
  248mm x 228mm x 220mm

OPTIONS
- Wired timer remote (FC-T), (page 61)
- Wireless remote (FC-W), (page 61)

HURRICANE™ 700

New

Free Pint of Fog Fluid

Wired Remote included

- Output: 1,500cfm
- 0.6L tank capacity
- Fog fluid included (0.5L)
- 4-minute heat up
- Manual fog button
- Wired remote included
- Water-based fogger
- Fluid consumption: 35ml/minute
- Power and current: 120V, 60Hz: 445W, 3.7A operating, 3.7A inrush, PF 1.00
- AC power: 115V/60Hz or 230V/50Hz
- Weight: 4lbs (1.8kg)
- Size: 8.5in x 7.1in x 4.9in
  215mm x 180mm x 125mm

FOG FLUID

FJU Gallon HDF Gallon FJQ Quart

Wired multi-function Remote included

Easy Refill Compartment

ARENA HAZER™

CONTROL FEATURES
- 2 or 3-channel DMX-512 professional hazer
- Dual component system:
  2-channel DMX-512 professional hazer
  1-channel DMX-512 squirrel cage blower
- Adjustable haze output via DMX, wired remote or control panel on rear
- Adjustable fan speed via DMX or control panel on rear
- Adjustable blower speed via DMX or control panel on rear with variable angles

ADDITIONAL FEATURES
- Road case included with easy-refill system
- True continuous output
- Output: 20,000cfm (haze)
- 1.4 quart tank capacity
- Wired multi-function remote included
- Water-based hazer

SPECIFICATIONS
- AC power: 115V/60Hz or 230V/50Hz
- Weight (in case): 77lbs (35kg)
- Weight (hazer): 18lbs (8.2kg)
- Size (case): 20.9in x 18.1in x 17in
  532mm x 460mm x 432mm
- Size (hazer): 15.4in x 10.2in x 6.7in
  390mm x 258mm x 171mm

ULTIMATE HZ™

HZ-1000

CONTROL FEATURES
- 2-channel DMX-512 hazer
- Adjustable haze output via DMX or wired remote
- Adjustable fan speed via DMX or wired remote

ADDITIONAL FEATURES
- Variable output angle
- Output: 1,500cfm
- 1.6 quart tank capacity
- Low fluid indicator and auto shutdown
- Wired multi-function remote included
- Water-based hazer

SPECIFICATIONS
- AC power: 115V/60Hz
- Weight: 16.5lbs (7.4kg)
- Size: 11.2in x 9.1in x 10.6in
  284mm x 231mm x 269mm

BUBBLE KING™

B-550

- 3 double wheels
- Manual bubble button
- Easily removable fluid tank
- AC power: 115V/60Hz or 230V/50Hz
- Weight: 13.2lbs (5.9kg)
- Size: 19in x 15in x 12in
  483mm x 381mm x 305mm

BUBBLE MACHINE

B-250

- Plastic construction prevents rust
- Manual bubble button
- Easily removable fluid tank
- AC power: 115V/60Hz or 230V/50Hz
- Weight: 6.8lbs (3.1kg)
- Size: 12.5in x 7in x 6.5in
  318mm x 178mm x 165mm

LIL' BUBBLER™

B-50

- Plastic construction prevents rust
- Easily removable fluid tank
- AC power: 115V/60Hz or 230V/50Hz
- Weight: 3.7lbs (1.6kg)
- Size: 10.8in x 6.5in x 6.7in
  274mm x 165mm x 170mm
- Pint of bubble fluid included

Pint of bubble fluid

Bubble-Fluid
BJU-Gallon
(sold separately)

Small but mighty!

Mirror, mirror on the bal

Accessories

Don't forget the cables

MIRROR BALLS

MB-16

- 16” mirror ball w/motor ring
- Weight: 7.2lbs (3.2kg)

MB-20

- 20” mirror ball w/motor ring
- Weight: 12lbs (5.4kg)

PARTY KIT

MBK-2

- 12” mirror ball with motor ring
- AC-operated motor (MOT-5)
- Pinspot with lamp
- AC Power: 115V/60Hz or 230V/50Hz
- Weight: 8lbs (3.6kg)

MIRROR BALL MOTOR

MOT-2

- 2rpm mirror ball motor
- Load capacity: 18lbs (11.2kg)
- AC power: 115V/60Hz or 230V/50Hz
- Weight: 1.3lbs (.6kg)

BOB™

CH-BOB

- Simulated flame effect
- Table top stand (34in. tall with flame)
- Hanging basket look (24in. tall with flame)
- Light source: CH-KIT4 (4 bulbs with silk)
- AC power: 115V/60Hz or 230V/50Hz
- Weight: 4.8lbs (2.2kg)
- Size: 11.5in x 11.5in x 9in
  292mm x 292mm x 229mm

New LED PINSPOT

- Extremely compact LED pinspot
- High-power, 3W (750mA) LED
- Beam angle: 9°
- Light source: 1 (white) LED
- Power and current: 120V, 60Hz: 2.4W, 0.03A operating, 0.3A inrush
- AC power: Autoswitching 100V – 240V 50/60Hz
- Weight: 0.7lbs (0.3kg)
- Size: 3.2in x 3.9in x 3.4in
  82mm x 99mm x 87mm

Actual Size!

YA-15 PINSPOT

- Light source: CH-4515 6V 30W lamp (included)
- AC power: Switchable 115V/230V 50/60Hz
- Weight: 2.35lbs (1.1kg)
- Size: 5.5in x 4.5in x 4.5in
  140mm x 114mm x 114mm

YA-06 PINSPOT

- Light source: CH-4515 6V 30W lamp (included)
- AC power: Switchable 115V/230V 50/60Hz
- Weight: 2.9lbs (1.3kg)
- Size: 5.5in x 4.5in x 4.5in
  140mm x 114mm x 114mm

COLORED LENSES

CL-36PK

- Available in 9 colors: red, green, blue, yellow, aqua, magenta, amber, pink, violet
- Hard plastic lens for par36 pinspot
- Sold in packs of 4 of the same color

PORTABLE TRUSSING

CH-31

- Easy setup
- Safety pins and T-bars included
- Load capacity: 200lbs (89.3kg) evenly distributed
- 10ft (3m) trussing span
- Height: 9ft (2.7m) fully extended
- Weight: 46lbs (20.5kg)

LIGHTING STAND

CH-01

- Heavy duty
- Safety pins
- 8 mounting screws included
- Load capacity: 100lbs (44.6kg)
- Height : 9ft (2.74m) fully extended
- Weight: 16.8lbs (7.5kg)

SPEAKER / FOLLOWSPOT STAND

CH-W28 (with wheels)

- 3 locking casters with safety pins
- Mounting plate fits most speakers
- Load capacity: 65lbs (29kg)
- Height: 6ft (1.8m) fully extended
- Weight: 9lbs (4kg)

CLAMPS

CLP-02
- Load capacity: 55lbs (24.5kg)
- Fits: 1in to 2in truss

CLP-03
- Load capacity: 44lbs (20kg)
- Fits: 1in to 2in truss

CLP-04
- Load capacity: 110lbs (49.1kg)
- Fits: 1in to 2.5in truss

CH-05
- Load capacity: 700lbs (312kg)
- Size: 31in (787mm)

CLP-06
- Load capacity: 220lbs (100kg)
- 360° wrap around pipe
- Fits: 2in truss

CLP-07
- Load capacity: 33lbs (312kg)
- Fits: 1in and 1.5in truss
- Size: 4.8in x 4.5in x 1.3in
  121mm x 114mm x 33mm

CLP-08
- Load capacity: 33lbs (312kg)
- Fits: 1in to 2in truss
- Size: 6.3in x 5.5in x 1.3in
  160mm x 140mm x 33mm

CLP-10
- Load capacity: 75lbs (33.5kg)
- 360° wrap around pipe
- Fits: 1in, 1.5in, 2in truss

CLP-15
- Load capacity: 660lbs (295kg)
- 360° wrap around pipe
- Fits: 2in truss

CLP-16
- Load capacity: 660lbs (300kg)
- Fits: 2in truss
- Size: 5.25in x 4in x 2in
  133mm x 102mm x 51mm

CLP-25
- Load capacity: 1,100lbs (500kg)
- Fits: 2in truss
- Size: 8.5in x 4in x 2in
  216mm x 102mm x 51mm

CABLES

EST-10MONO & STEREO
- 33' mono 1/4 to 1/4

DMX-5F
- 12" long, 3-pin male XLR to 5-pin female XLR

DMX-5M
- 12" 5-pin male XLR to 3-pin female XLR

DMX-10; DMX-4.5; DMX-1.5
- 33', 15' & 5' DMX 3-pin XLR

PC-1AC
- Replacement power cable
- IEC to Edison

SF-EXCB
- 25' 9-pin, linkable for SR-8 Relay Pack

CH-DIN20
- 66' linkable DIN

EXT-2
- 33' IEC extension cable

new
Build yo
e the boss
Controllers
Thou shall Obey!™
PRO-D6
You have the power

ShowXpress™

TOTAL CONTROL, EASY PROGRAMMING, USER FRIENDLY

CONTROL BOARD-A control panel, in menu form, from which different windows are accessed.

BUILDER-Program and manage your fixture's channels and fixture grouping.

LIVE-Fully customizable. Single button triggers provide a number of functions, including: trigger lighting scene, trigger multimedia file, begin a timeline, or layer a timeline. Can be password locked.

TIMELINE-Synchronized multimedia presentation editing software to play multiple file formats (video, picture, audio, and lighting scenes) on plasma, video projector, or LED video displays (via a video to LED matrix).

1 Convenient Software, 3 Interfaces to Choose from

XPRESS PLUS™

- Rackmount USB interface with 512 DMX channels • Connect 2 Xpress Plus™ for 1024 DMX channels (2 universes)
- DMX-in controls the shows via external controller • DMX-in/out also works in stand-alone mode
- Unlimited shows when using computer • Connector for external button system • USB or Autoswitching 100V – 240V 50/60Hz
- Upload up to 14 shows into the stand-alone box • Start automatically without computer • Stand-alone speed control
- Stand-alone run of up to 4 scenes simultaneously • DMX input works in stand-alone

X-FACTOR™

- DMX-512 USB interface • Connect 2 X-Factors™ for 1024 DMX channels (2 universes) • DMX input for on-the-fly, external override
- Selectable power options: USB or DC adaptor • Playback 1 show without a computer • Unlimited shows when using a computer
- Windows®-based user interface • Power: USB or DC 12V 500mA 115V/60Hz or 230V/50Hz (not included) • Weight: 1.5lbs (0.7kg)
- Size: 6.3in x 5.2in x 2.5in / 160mm x 132mm x 64mm

XPRESS™ 100

- USB to DMX cable • 10 fixtures with a maximum of 100 DMX channels • Unlimited shows when using a computer
- Windows®-based user interface• Power: USB 5V • Weight: 0.2lbs (0.1kg) • Length: 43in (1.1m)

FOR COMPLETE SPECS AND FREE SOFTWARE UPGRADES GO TO:

WWW.CHAUVETLIGHTING.COM/SHOWXPRESS-SOFTWARE.HTML

Specifications subject to change without notice • All products meet CSA and CE standards

D-Fi 2.0 New

DMX-DFI2

- Transmits / Receives up to 512 DMX channels wirelessly
- Controls up to 6 universes or 3,072 DMX channels (requires multiple units)
- Use with any universal DMX-512 controller
- 6 user-selectable UHF frequencies
  - 909MHz / 910MHz
  - 915MHz / 916MHz
  - 925MHz / 926MHz
- Durable, extruded aluminum casing
- Functions as transmitter or receiver
- Self-contained unit with no setup required
- Requires two units for operation per universe
- Unobstructed distance: 393ft (120m)
- FCC compliant
- Power: DC 12V 500mA 115V/60Hz or 230V/50Hz
- Weight: 0.8lbs (0.7kg)
- Size: 6.5in x 3.5in x 1.5in
  165mm x 89mm x 38mm

Front Back

STAGE DESIGNER 50 New

- 48-channel DMX-512 dimming console
- 8 pages with 12 scenes each yields 96 total playback faders (simultaneous playback)
- 96,000 programmable steps
- 2 programmable aux. buttons
- Adjustable chase and fade times
- Re-assignable channels
- 3-pin and 5-pin DMX connections
- Built-in cross fader, dark and kill buttons
- MIDI in, out and thru (with file dump)
- Direct audio input
- Sequential linking or simultaneous playback of chases
- Override chases on the fly
- Beat-activation, tap sync, auto run, MIDI in/out
- 6-space (6U) rack mount
- Polarity selector
- Power: DC 9-12V 500mA 115V or 230V
- Weight: 9.9lbs (4.5kg)
- Size: 19in x 10.5in x 3.5in
  483mm x 267mm x 89mm

New Obey™ 10

- Universal DMX-512 controller
- Controls up to 8 intelligent lights of up to 16 channels each
- 128 DMX channels of control
- 6 sets of chases containing 999 scenes each
- Program fade and speed time into each step
- Reversible sliders
- Re-assignable channels
- Sequential linking of chases
- Grab any fixture on the fly
- Beat activation and auto run
- DMX polarity selector
- 2-space (2U) rack mount
- Power: DC 12V 500mA 115V/60Hz or 230V/50Hz
- Weight: 3.9lbs (1.78kg)
- Size: 19in x 3.5in x 3.5in
  482mm x 89mm x 89mm

New Obey™ 40

- Universal DMX-512 controller
- Controls up to 12 intelligent lights of up to 16 channels each
- 30 banks of 8 scenes, 240 scenes max
- 192 DMX channels of control
- 6 sets of chases containing 240 scenes
- Program fade and speed time into each step
- Reversible sliders
- Re-assignable channels
- Sequential linking of chases
- Fog & strobe control buttons
- Grab any fixture on the fly
- Beat activation, tap-sync and auto run
- DMX polarity selector
- 3-space (3U) rack mount
- MIDI compatible
- Power: DC 12V 500mA 115V/60Hz or 230V/50Hz
- Weight: 5.7lbs (2.6kg)
- Size: 20.25in x 3.5in x 6.75in
  514mm x 89mm x 171mm

New Obey™ 70

- Universal DMX-512 controller
- Controls up to 12 intelligent lights of up to 32 channels each
- 30 banks of 8 scenes, 240 scenes max
- 384 DMX channels of control
- 6 sets of chases containing 240 scenes
- Program fade and speed time into each step
- Reversible sliders
- Re-assignable channels
- Sequential linking of chases
- Assignable pressure-sensitive joystick
- Grab any fixture on the fly
- Beat activation, tap-sync and auto run
- DMX polarity selector
- 4-space (4U) rack mount
- MIDI compatible
- Power: DC 12V 500mA 115V/60Hz or 230V/50Hz
- Weight: 7.3lbs (3.3kg)
- Size: 19in x 7in x 2.8in
  483mm x 178mm x 71mm

DIMMER/RELAY PACK

DMX-4

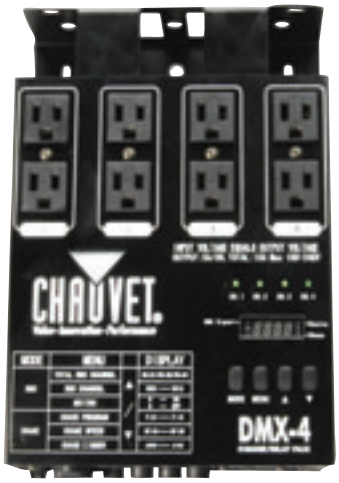

- 4-channel DMX-512 dimmer / relay pack
- 2 Edison plugs per channel
- Each channel can be set as either dimmer or relay
- Each channel can be set to any DMX address
- 16 user-selectable chase patterns
- Variable electronic dimmer (0-100%)
- Adjustable speed control and dimming with or without DMX
- Output (115V): 10A (1,150W) per channel, 15A (1,725W) max
- Output (230V): 5A (1,150W) per channel, 15A (3,450W) max
- AC power: Switchable 115V/230V 50/60Hz
- Weight: 5lbs (2.2kg)
- Size: 8.25in x 7.65in x 2.75in
  210mm x 194mm x 70mm

PRO-D6

PRO-D6

CONTROL FEATURES
- 6-channel DMX-512 dimmer/switch
- Dimmer curve selection for each channel: square, switch or linear
- Each channel can be set as either dimmer or relay
- Each channel can be set to any DMX address
- Dual 20A power lines (requires 2 separate circuits)
- Individual switch, circuit breaker and plug per line
- Accommodates different voltages per line (simultaneously)
- Output (115V): 15A (1,725W) per channel, 20A (2,300W) max. per line
- Output (230V): 15A (3,450W) per channel , 20A (4,600W) max. per line
- AC power: Autoswitching 90V – 264V 50/60Hz
- Weight: 9.3lbs (4.2kg)
- Size: 18in x 5.8in x 3.8in
  457mm x 147mm x 97mm

20A Plug

TIMER SYSTEM™ PACKAGE

SF-9005

- 8 on/off/chase switches
- Two chase options:
  a) 16 patterns sound-activation
  CH 1-4 and/or CH 5-8
  b) Timed chase 20sec - 15min
  CH 1-4 and/or CH 5-8
- Built-in fog & strobe controllers
- Three-way switch 1/4 output for CH-865 16-Pattern Controller
- 1 linkable (SR-8) relay pack with 8 sockets
- Output (115V): 5A (575W) per channel, 15A (1,725W) max.
- Output (230V): 5A (1150W) per channel, 15A (3,450W) max.
- AC power: Switchable 115V/230V 50/60Hz
- Weight: 9.5lbs (4.8kg)
- Size: 19in x 3.5in x 2.3
  482mm x 88mm x 58mm

2/4 CHANNEL TIMER

SF-4005

- 2 or 4-channel controller (selectable)
- 1 or 2 Edison plug(s) per channel
- 2-position switch:
  Slow chase (1 min. to 15 min.)
  Fast chase (1 sec. to 1 min.)
- Sound-activation
- Speed control
- Output (115V): 3A (345W) per channel, 6A (690W) max.
- Output (230V): 3A (690W) per channel, 10A (1,380W) max.
- AC power: Switchable 115V/230V 50/60Hz
- Weight: 1.5lbs (0.7kg)
- Size: 8in x 5.3in x 3in
  203mm x 135mm x 76mm

POWER PANEL

PC-08

PC-09

- 8 switches, 15 amps
- All switches independently controlled and grounded
- 1-space (1U) rack mount
- Output (115V): 15A (1,725W)per channel, 15A (1,725W) max.
- Output (230V): 10A (2,300W) per channel, 10A (2,300W) max.
- AC power: 115V/230V 50/60Hz
- Weight: 4lbs (1.8kg)
- Size: 19in x 4in x 1.75in
  483mm x 102mm x 44mm

STAGE™ 4

TFX-DC4

- 1,725-watt sound activated controller with individual fader controls
- 16 built-in automatic and sound-activated chases
- Full on and blackout
- Speed control
- 4 individually-fused AC outlets on rear
- 4 dimmer faders for manual control/override
- Output (115V): 5A (575W) per channel, 15A (1,725W) max.
- Output (230V): 5A (1,150W) per channel, 15A (3,450W) max.
- AC power: Switchable 115V/230V 50/60Hz
- Weight: 5lbs (2.3kg)
- Size: 11in x 4.5in x 2.8in
  280mm x 123mm x 70mm

16-PATTERN CONTROLLER

CH-866

- 4-channel sound-activated controller
- 2 Edison plugs per channel
- Selectable: chase, all on, 16 pattern chase to sound/auto, all flash
- Linkable via optional CH-DIN20 cable
- Output (115V): 5A (550W) per channel, 15A (1,650W) max
- Output (230V): 5A (1,150W) per channel, 15A (3,450W) max
- Power: Switchable 115V/230V 50/60Hz
- Weight: 5.9lbs (2.7kgs)
- Size: 11in x 7in x 3in
  279mm x 178mm x 76mm

RELAY PACK

SR-8

- 8 channels, 15 amps
- 1 unswitched socket
- Linkable relay pack
- For SF-9005 Timer System™
- Output (115V): 5A (575W) per channel, 15A (1,725W) max.
- Output (230V): 5A (1,150W) per channel, 15A (3,450W) max.
- AC power: Switchable 115V/230V 50/60Hz
- Weight: 3lbs (1.3kg)
- Size: 14in x 3.5in x 3.5in
  356mm x 89mm x 89mm

CHAUVET®

Value • Innovation • Performance

General Information: info@chauvetlighting.com
Technical Support: tech@chauvetlighting.com

3000 North 29th Court
Hollywood, FL 33020
USA

www.chauvetlighting.com

Distributed by: